

PRODUCT SELECTION GUIDE

- Circuit Breakers
- Industrial Products

» *Always for your safety*



Always for your safety



RoHS

COMPANY INTRODUCTION

Zhejiang ETEK Electrical Technology Co., Ltd. (Abbreviation: ETEK Electric) is a professional manufacturing company dedicated to the research, development, production, and sales of low-voltage electrical appliances. The company was established in 2011 and is located in Wenzhou City, Zhejiang Province. At present, the company has 40K sqm of modern manufacturing bases in Wenzhou and Wuhu with over 500 employees, including over 50 R&D and technical personnel. ETEK Electric has multiple production workshops for mold design, parts manufacturing, welding, and assembly. Additionally, they have multiple automated production lines for MCB and RCCB. Our products include MCB, RCCB, RCBO, AFDD, MCCB, ACB, EV Chargers, Photovoltaic DC products, etc., which can meet the needs of different countries and are widely used in fields such as residential, commercial, and industrial.

ETEK Electric has passed ISO9001 quality management system and environmental management system certification. The company have built our own low-voltage electrical testing center, and most of the testing items can meet the requirements of international IEC standards, in addition, our products have obtained international CB, TUV, VDE, CE, RoHS and other quality certificates.

ETEK Electric constantly masters and breaks through the core technology of circuit breakers, with more than 100 national patents. Focusing on independent brand construction is crucial for the company's development. The "ETEK" trademark is registered in over 80 countries. Products are exported to over 60 countries and regions including the European Union, South America, the Middle East, Africa, and Southeast Asia.


We also support OEM, ODM, OBM, SKD, CKD and other business cooperation models, and provide customers with a full range of services covering market cultivation, technical training, and factory construction.

ETEK Electric has been adhering to the business policy of "Growth", "Quality", "Efficiency", and "Innovation". In 2023, ETEK Electric has formulated the fifth 3-year strategic plan, which specifies the three major initiatives of expanding the production scale, enhancing the new energy market share, and expanding the independent brand, to realize the annual revenue target of \$50 million by 2026.

Looking forward to the future, ETEK Electric will be committed to becoming a globally renowned manufacturer in the power distribution and electrical industry, safeguarding the power safety of global customers, and helping the development of green and digital energy.




ENTERPRISE HISTORY

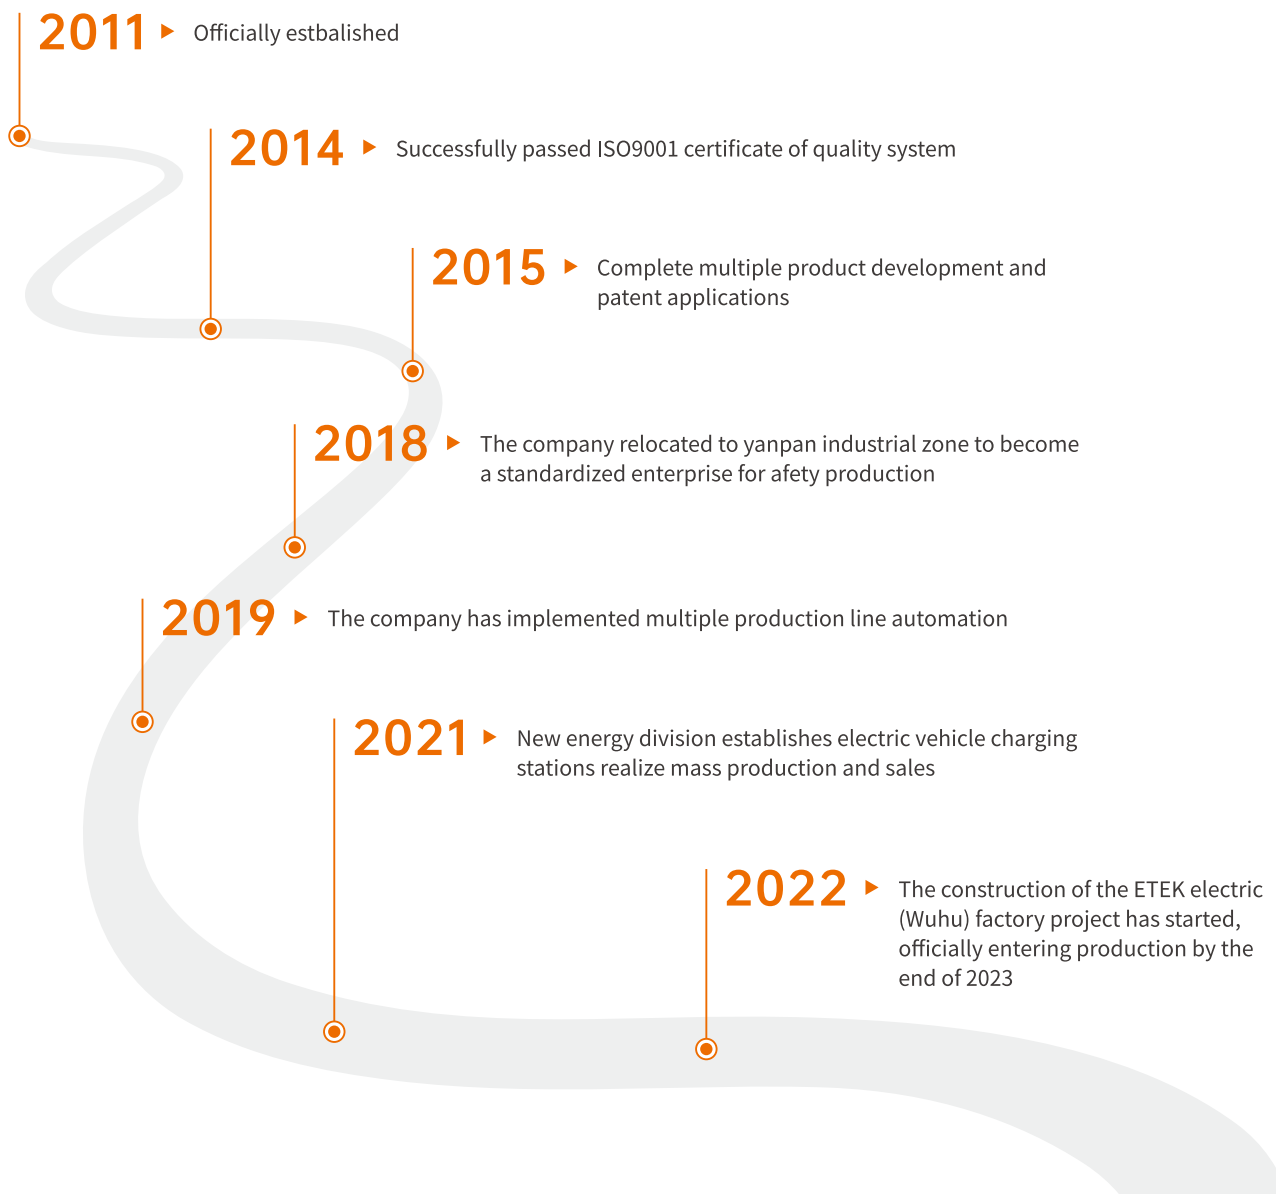

WORKSHOPS



OEM & ODM BUSINESS

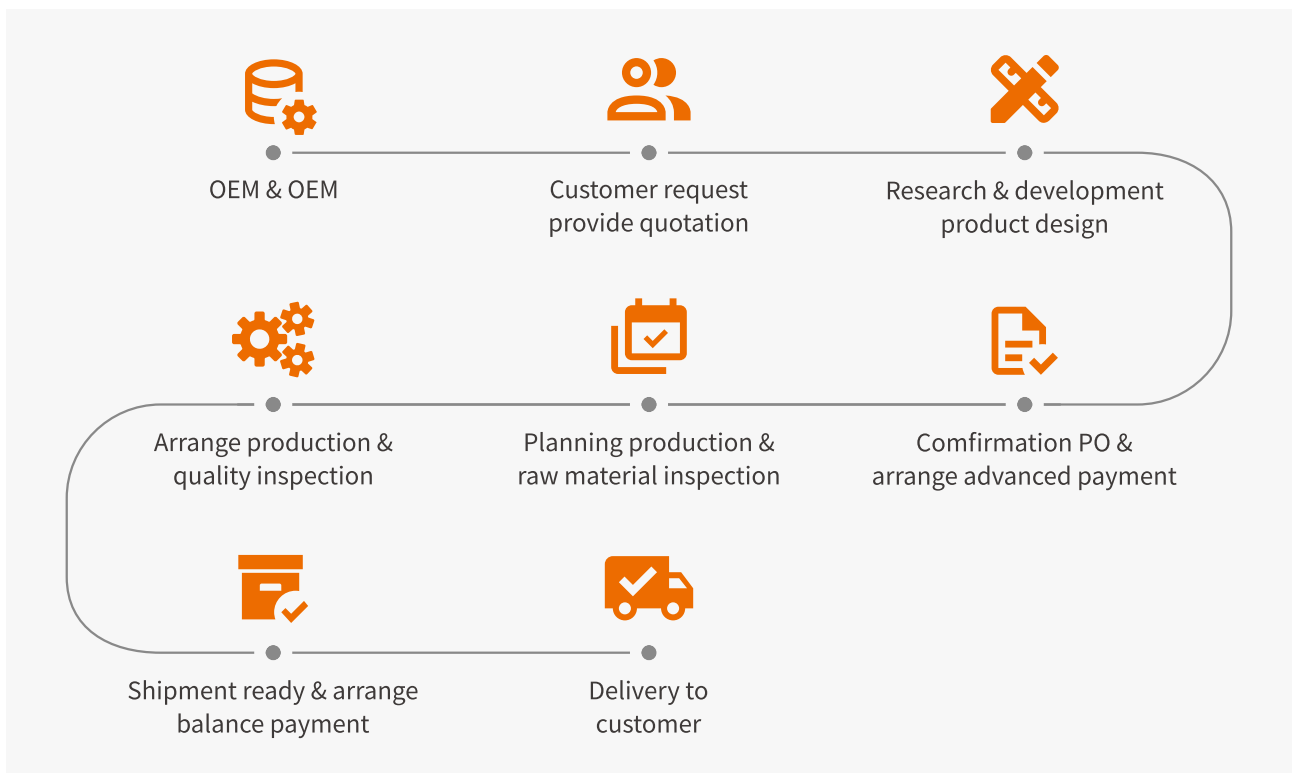

INTERNATIONAL CERTIFICATION




ISO9001




ISO14001




ISO45001

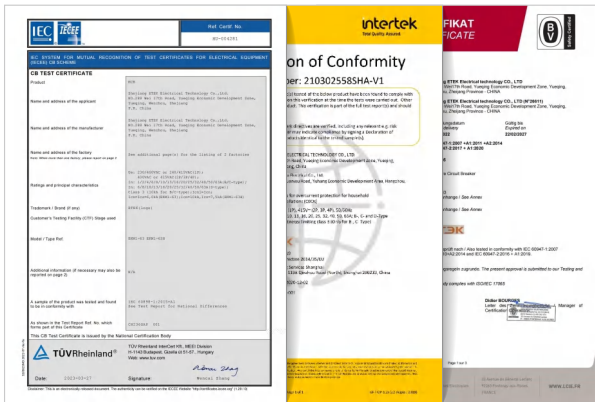


MCB Certificates

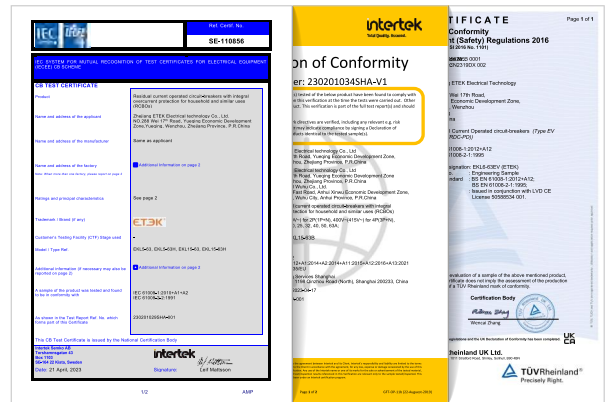

RCBO Certificates

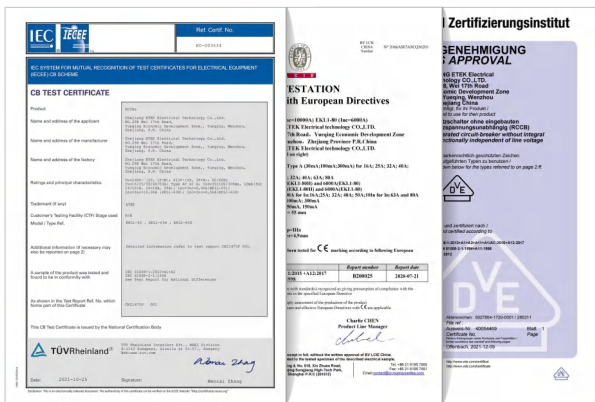

RCCB Certificates

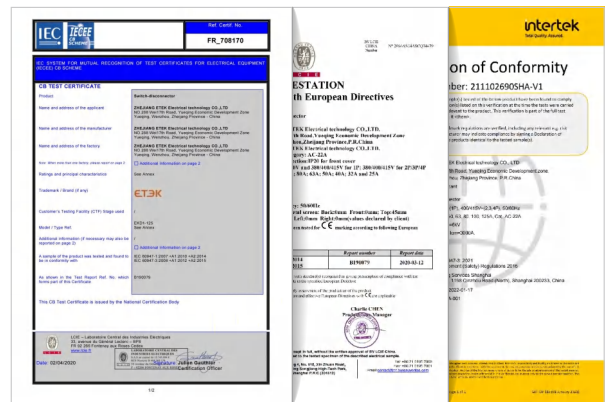

Isolator Switch Certificates



CONTENTS

Electrical Protection Devices

Mini Circuit Breaker (MCB)	01
Residual Current Circuit Breaker (RCCB)	09
Residual Current Circuit Breaker with Overcurrent Protection (RCBO)	13
Arc-Fault Detection Device (AFDD)	19
Isolator Switch	21
Smart Circuit Breaker	23
MCB Accessory	25

Other Modular Devices

Modular Contactor	27
Changeover Switch	28
Modular Voltage Meter & Signal Lamp	30

Fuse Link and Fuse Disconnecter

AC Fuse Link and Fuse Disconnecter (AC Fuse)	32
DC Fuse Link and Fuse Disconnecter (DC Fuse)	33

Surge Protection Devices

AC Surge Protection Devices (AC SPD)	36
DC Surge Protection Devices (DC SPD)	38

Industrial Circuit Breakers

Molded Case Circuit Breaker (MCCB)	40
Air Circuit Breaker (ACB)	45

Electrical Control Devices

AC Contactor	48
Thermal Overload Relay	49
Motor Protection Circuit Breaker	50
DOL Starter	51

Distribution Box

Plastic Distribution Box	53
Metal Distribution Box	56
PV Combiner Box	58

Mini Circuit Breaker

Miniature Circuit Breakers (MCBs) are crucial components in modern electrical systems. They are designed to protect low-voltage electrical circuits and consist of a switch that automatically trips and cuts off the power supply when an overload or short circuit is detected. This feature helps prevent damage to the electrical circuit and equipment.

Etek Electric provides a series of several types of miniature circuit breakers with different breaking capacities. You can check the MCB classification for more information.



MCB EKM1-63S 4.5kA

Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM1-63 6kA

Mini Circuit Breaker



CB CE  

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM1-63H 10kA

Mini Circuit Breaker



CB CE  

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM2-63X 4.5kA

Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM2-63 6kA

Mini Circuit Breaker



CB CE UK CA

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM12-63H 10kA

Mini Circuit Breaker



CB CE UK CA

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM3-63S 4.5kA
Mini Circuit Breaker



Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

CB CE

MCB EKM3-63 6kA
Mini Circuit Breaker



Standard	IEC/EN60898-1	IEC/EN60947-2
No. of poles	1P,2P,3P,4P,1P+N,3P+N	
Rated currents (In)	1-63A	
Rated voltage (Ue)	240/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	6,000A	
Rated impulse voltage (Uimp)	6,000V	
Thermal release characteristic	(1.13-1.45) x In	(1.05-1.30) x In
Magnetic release characteristic	B, C	(8-12) x In
Electrical life	8,000 Cycles	
Mechanical life	20,000 Cycles	

CB CE UK CA SAA

MCB EKM3-63H 10kA
Mini Circuit Breaker



Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

CB CE UK CA SAA

MCB EKM1-40N/EKM2-40N 6kA

Mini Circuit Breaker



Standard	IEC/EN60898-1
No. of poles	1P+N
Rated currents (In)	6-40A
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	EKM1-40N: B, C EKM2-40N: B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM3-100 6kA

Mini Circuit Breaker



Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	63-100A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM1-125S 6kA

Mini Circuit Breaker



Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	63-125A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM1-125H 15kA

Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1	IEC/EN60947-2
No. of poles	1P,2P,3P,4P,1P+N,3P+N	
Rated currents (In)	63-125A	
Rated voltage (Ue)	240/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	10,000A	15,000A
Rated impulse voltage (Uimp)	4,000V	
Thermal release characteristic	(1.13-1.45) x In	(1.05-1.30) x In
Magnetic release characteristic	C, D	(8-12) x In
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	

MCB EKM2-125H 10kA

Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1	IEC/EN60947-2
No. of poles	1P,2P,3P,4P,1P+N,3P+N	
Rated currents (In)	63-125A	
Rated voltage (Ue)	240/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	6,000A	10,000A
Rated impulse voltage (Uimp)	4,000V	
Thermal release characteristic	(1.13-1.45) x In	(1.05-1.30) x In
Magnetic release characteristic	C, D	(8-12) x In
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	

MCB EKM3-125H 10kA

Mini Circuit Breaker



CB CE UK CA

Standard	IEC/EN60898-1	IEC/EN60947-2
No. of poles	1P,2P,3P,4P,1P+N,3P+N	
Rated currents (In)	80-125A	
Rated voltage (Ue)	240/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	6,000A	10,000A
Rated impulse voltage (Uimp)	4,000V	
Thermal release characteristic	(1.13-1.45) x In	(1.05-1.30) x In
Magnetic release characteristic	C, D	(8-12) x In
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	

Plug-in MCB EKM3-63P 6kA EKM1-63HP 10kA

Plug-in Miniature Circuit Breaker



CE

Standard	IEC 60898-1
No. of poles	1P, 2P, 3P
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A; 10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C
Electrical endurance (Number of operation cycles)	≥10000
Mounting type	Plug-in

DC MCB EKM1-63DC

Mini Circuit Breaker



CE

Standard	IEC/EN60947-2
No. of poles	1P, 2P, 4P
Rated currents (In)	1-63A
Rated voltage (Ue)	1P(250VDC), 2P(500VDC), 4P(1000VDC)
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.05-1.30) x In
Magnetic release characteristic	(8-12) x In
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

DC MCB EKM1-125DC

Mini Circuit Breaker



CE

Standard	IEC/EN60947-2
No. of poles	1P, 2P, 4P
Rated currents (In)	80-125A
Rated voltage (Ue)	1P(250VDC), 2P(500VDC), 4P(1000VDC)
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.05-1.30) x In
Magnetic release characteristic	(8-12) x In
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

EKM2-63M Economic Type
Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

MCB EKM12-63X 6kA
Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1
No. of poles	1P,2P,3P,4P,1P+N,3P+N
Rated currents (In)	1-63A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal release characteristic	(1.13-1.45) x In
Magnetic release characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

EKM2-125 Economic Type
Mini Circuit Breaker



CB CE

Standard	IEC/EN60898-1	IEC/EN60947-2
No. of poles	1P,2P,3P,4P,1P+N,3P+N	
Rated currents (In)	63-125A	
Rated voltage (Ue)	240/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	6,000A	
Rated impulse voltage (Uimp)	4,000V	
Thermal release characteristic	(1.13-1.45) x In	(1.05-1.30) x In
Magnetic release characteristic	B, C	(8-12) x In
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	

Residual Current Circuit Breaker

RCCB, or Residual Current Circuit Breaker, is an electrical safety device that detects and interrupts an electrical circuit when there is a leakage current to the ground. It is designed to protect people and equipment from electric shocks, fires, and other hazards caused by faulty wiring, insulation failure, or accidental contact with live parts. The RCCB is a leakage current sensing device that can automatically measure and disconnect the circuit whenever a fault occurs, or the current exceeds the rated sensitivity. In combination with an MCB or fuse, RCCBs ensure protection against electric shock caused by indirect contact.

ETEK Electric can currently provide you with a variety of diverse types of RCCB (such as AC, A, S, B, EV(A+DC6mA)) to meet the needs of different application scenarios.



RCCB EKL1-63(H)

Residual Current Circuit Breaker



Standard	IEC/EN61008-1
No. of poles	1P+N, 3P+N
Rated currents (In)	16-63A
Type of protection	AC, A, G, S
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

RCCB EKL1-80(H)

Residual Current Circuit Breaker



New generation products		Operating mechanism: plastic structure.
Standard	IEC/EN61008-1	
No. of poles	1P+N, 3P+N	
Rated currents (In)	16-80A	
Type of protection	AC, A, G, S	
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA	
Residual current off-time under IΔn	≤0.1s	
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	6,000A, 10,000A	
Rated impulse voltage (Uimp)	4,000V	
Electrical life	2,000 Cycles	
Mechanical life	4,000 Cycles	

RCCB EKL1-125H 10ka

Residual Current Circuit Breaker



New generation products		Operating mechanism: plastic structure.
Standard	IEC/EN61008-1	
No. of poles	1P+N, 3P+N	
Rated currents (In)	80-125A	
Type of protection	AC, A, G, S	
Rated sensitivity currents (IΔn)	30, 100, 300mA	
Residual current off-time under IΔn	≤0.1s	
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~	
Rated frequency	50/60Hz	
Rated breaking capacity	10,000A	
Rated impulse voltage (Uimp)	4,000V	
Electrical life	2,000 Cycles	
Mechanical life	4,000 Cycles	

RCCB EKL6-100(H)

Residual Current Circuit Breaker



RCCB EKL11-63(H)

Residual Current Circuit Breaker



RCCB EKL11-63T(H)

Residual Current Circuit Breaker



Standard	IEC/EN61008-1
No. of poles	1P+N, 3P+N
Rated currents (In)	16-100A
Type of protection	AC, A, G, S
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (U _{imp})	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

New generation products Operating mechanism: plastic structure.

Standard	IEC/EN61008-1
No. of poles	1P+N, 3P+N
Rated currents (In)	16-63A
Type of protection	AC, A, G, S
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (U _{imp})	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

New generation products Operating mechanism: plastic structure.

Standard	IEC/EN61008-1
No. of poles	1P+N, 3P+N
Rated currents (In)	16-63A
Type of protection	AC, A, G, S
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (U _{imp})	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

RCCB Type B EKL1-63B

Residual Current Circuit Breaker



Standard	IEC/EN61008-1, IEC62423
No. of poles	1P+N, 3P+N
Rated currents (In)	16-63A
Type of protection	B
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

RCCB Type B EKL6-100B

Residual Current Circuit Breaker



Standard	IEC61008-1, IEC62423
No. of poles	1P+N, 3P+N
Rated currents (In)	16-100A
Type of protection	B
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 240V~ 3P+N: 415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

RCCB Type EV EKL6-63EV

Residual Current Circuit Breaker



Standard	IEC61008-1, IEC62955
No. of poles	1P+N, 3P+N
Rated currents (In)	25-63A
Type of protection	A
Rated sensitivity currents (IΔn)	30mA
DC tripping threshold (IΔdc)	6mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 240V~ 3P+N: 415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles

RCCB with Over-current Protection

RCBO, short for Residual Current Circuit Breaker with Overcurrent Protection, is an automatic electrical switch that plays a crucial role in protecting circuits and individuals from electrical hazards. It is designed to detect any current leakage in the circuit that exceeds the rated sensitivity and automatically disconnects the circuit in the event of a fault.

RCBOs are widely used in residential, commercial, industrial, medical, laboratory, and scientific applications where circuits and equipment need to be protected from leakage currents. Compared to RCD, RCBO offers both leakage protection and overload and short circuit protection, making it a safer and more reliable option.

At ETEK Electric, we offer a variety of RCBO types, including AC, A, S, B, and EV(A+DC6mA), to meet different application scenarios. Our RCBOs are carefully designed and manufactured to provide the highest level of protection to your electrical systems and personnel.



RCBO EKL2-40 6kA

RCCB with Overcurrent Protection
(Electronic Type)



CB CE UK CA

Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL17-40 6kA

RCCB with Overcurrent Protection
(Electronic Type)



CB CE UK CA

Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL3-40S 4.5kA

RCCB with Overcurrent Protection
(Electronic Type)



CB CE

Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL3-63 6kA

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (In)	6-63A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL3-40M 6kA

RCCB with Overcurrent Protection
(Electro-magnetic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (In)	6-40A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL5-63S 4.5kA

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N, 3P+N (N Pole on left)
Rated currents (In)	6-63A
Type of protection	AC, A, S
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	4,500A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL5-63(H)

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No.of poles	1P+N, 3P+N
Rated currents (In)	6-63A
Type of protection	AC, A, S
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL8-40M 6kA

RCCB with Overcurrent Protection
(Electro-magnetic Type)



Standard	IEC/EN61009-1
No.of poles	1P+N
Rated currents (In)	6-40A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL8-80 6kA

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No.of poles	1P+N
Rated currents (In)	6-80A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL19-40 6kA

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL29-40M 6kA

RCCB with Overcurrent Protection
(Electro-magnetic Type)



Standard	IEC/EN61009-1 IEC/EN60898-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL29-40 6kA

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1 IEC/EN60898-1
No. of poles	1P+N
Rated currents (I _n)	6-40A
Type of protection	AC, A
Rated sensitivity currents (I _{Δn})	10, 30, 100, 300mA
Residual current off-time under I _{Δn}	≤0.1s
Rated voltage (U _e)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (U _{imp})	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL13-63

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N
Rated currents (In)	6-63A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

RCBO EKL15-63(H)

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1
No. of poles	1P+N, 3P+N
Rated currents (In)	6-63A
Type of protection	AC, A, S
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A, 10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

**RCBO Type B EKL5-63B
EKL15-63B**

RCCB with Overcurrent Protection
(Electronic Type)



Standard	IEC/EN61009-1, IEC/EN62423
No. of poles	1P+N, 3P+N
Rated currents (In)	6-63A
Type of protection	B
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	1P+N: 230/240V~ 3P+N: 400/415V~
Rated frequency	50/60Hz
Rated breaking capacity	10,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C, D
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles

Arc-Fault Detection Device

AFDD, or Arc Fault Detection Device, is an electrical safety device designed to detect and prevent electrical arc faults in a circuit. When an arc fault is detected, the device will interrupt the circuit, preventing potential fire hazards. Some AFDDs are combined with residual current circuit breakers (RCCB) and miniature circuit breakers (MCB) to provide comprehensive protection against several types of electrical faults.

Protect your home from electrical fires by installing our dependable Arc Fault Detection Devices (AFDDs) from ETEK Electric.



Complete Circuit Protection					
	Over Current	Short Circuit	Earth Leakage	Series Arc Fault	Parallel Arc Fault
MCB	✓	✓	✗	✗	✗
RCCB	✗	✗	✓	✗	✗
RCBO	✓	✓	✓	✗	✗
AFDD	✗	✗	✗	✓	✓
AFDD integrated with RCBO	✓	✓	✓	✓	✓

EKL17-40AFD RCBO AFDD

RCBO with Arc Fault Protective



Standard	IEC/EN61009-1, IEC62026
No. of poles	1P+N
Rated currents (In)	6-40A
Type of protection	A
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	230/240V~
Rated frequency	50/60Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles
Connection	From bottom

EKL19-40AFD RCBO AFDD

RCBO with Arc Fault Protective



Standard	IEC/EN61009-1, IEC62026
No. of poles	1P+N
Rated currents (In)	6-40A
Type of protection	AC, A
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under IΔn	≤0.1s
Rated voltage (Ue)	240V~
Rated frequency	50Hz
Rated breaking capacity	6,000A
Rated impulse voltage (Uimp)	4,000V
Thermal-magnetic characteristic	B, C
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles
Connection	From top

Isolator Switch

Isolator Switch or Switch Disconnecter is an essential electrical component used to isolate power supply or devices. It is designed to cut off the power supply or separate the device from the power source, ensuring the safety of maintenance and overhaul work.

During repair or maintenance of electrical equipment, staff must not meet live parts, and an Isolator Switch helps prevent such accidents from occurring.



EKD1-125
Isolator Switch



CB CE UK CA

Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	25-125A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	10,000 Cycles

EKD2-125
Isolator Switch



CB CE UK CA

Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	25-125A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	10,000 Cycles

EKD3-125
Isolator Switch



CB CE UK CA

Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	25-125A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Rated impulse voltage (Uimp)	4,000V
Electrical life	2,000 Cycles
Mechanical life	10,000 Cycles

Smart Circuit Breaker

Smart Circuit Breaker - an advanced electronic device designed to operate and monitor circuits, as well as collect usage data of the connected load devices through remote control. With real-time feedback and recording capabilities, this innovative device can provide comprehensive information on the status of circuits and equipment via the Internet.

ETEK Electric offer four distinct series of Smart Circuit Breakers - EKR3, EKR3L (with optional automatic reclosing), EKR3S and EKR0. Our range of products is designed to cater to the diverse needs of our customers, ensuring that they have access to the best solutions for their unique requirements.





EKR3



EKR3S



EKR3L



EKR0

Model	EKR3	EKR3S	EKR3L	EKR0
No. of poles	1P, 2P, 3P, 4P	1P, 2P, 3P, 4P	1P+N	1P+N, 3P+N
Rated voltage (Ue)	240/415V	240/415V	230/240V	240/415V
Rated currents (In)	6-63A	63-100A	6-63A	6-63A
Rated breaking capacity	6000A	6000A	6000A	6000A
Rated sensitivity currents (IΔn)	-	-	30, 100, 300mA	30, 100, 300mA
Remote control	●	●	●	●
Padlock	●	●	●	●
Timed task	●	●	●	●
Automatic reclosing	○	/	○	/
Power metering	/	○	/	●
Fault feedback	/	●	/	●
Overvoltage protection	○	●	○	●
Undervoltage protection	○	●	○	●
Overcurrent protection	●	●	●	●
Overload protection	●	●	●	●
Leakage protection	/	/	●	●
Leakage detection	/	/	/	○
Over temperature protection	/	○	/	●
Short circuit protection	●	●	●	●
Data collection	/	●	/	●
Power limit	/	●	/	●
Fault record	/	●	/	●

Note: ● Standard ○ Optional / None

EKM1-MX / EKM1-MX+MN

Shunt Release / Over/Under-voltage Tripper



Standard	IEC/EN60947-5-1
Rated voltage (Ue)	AC230V
Rated impulse voltage (Uimp)	4,000V
Over-voltage tripping range	280V±5%
Under-voltage tripping range	170V±5%
Electrical life	4,000 Cycles
Mechanical life	4,000 Cycles
Applicable models	EKM1,EKM3,EKL3,EKL13

EKM1-OF / EKM1-FB

Auxiliary Contact / Alarm Auxiliary Contact



Standard	IEC/EN60947-5-1
Rated value	AC415/400V, 50/60Hz, 3A AC240/400V, 50/60Hz, 3A DC130V, 1A DC48V, 2A DC24V, 6A
Configurations	EKM1-OF: 1NO+1NC EKM1-FB: 2NO+2NC
Rated impulse voltage (Uimp)	4,000V
Electrical life	6,000 Cycles
Mechanical life	10,000 Cycles
Applicable models	EKM1,EKM3,EKL3,EKL13

EKM2-UT / EKM2-ST

Over/Under-voltage Tripper / Shunt Release Tripper



Standard	IEC/EN60947-5-1
Rated value	EKM2-UT: AC230V, 50/60Hz EKM2-ST: AC230V/400V, 50/60Hz AC/DC24V AC/DC48V
Rated impulse voltage (Uimp)	4,000V
Electrical life	4,000 Cycles
Mechanical life	4,000 Cycles

EKM2-OF / EKM2-FB

Auxiliary Contact / Alarm Auxiliary Contact



Standard	IEC/EN60947-5-1
Rated value	AC415V, 50/60Hz, 3A AC240V, 50/60Hz, 6A DC130V, 1A DC48V, 2A DC24V, 6A
Configurations	1NO+1NC
Rated impulse voltage (Uimp)	4,000V
Electrical life	6,050 Cycles
Mechanical life	10,000 Cycles
Applicable models	EKM2 MCB

Other Modular Devices

ETEK Electric can not only provide common MCBs, RCCBs, RCBOs and SPDs in circuit protection, but also provide other modular equipment, including Modular Contactors, MCB Changeover Switch, Modular Voltage Meter, Modular Signal Lamp, LV Fuses, etc.

These devices can assist users to diversify circuit protection and management and provide the best protection measures for electrical equipment and appliances.



EKMF Modular AC Contactor



Standard	IEC61095
Poles	1P, 2P, 3P, 4P
Method of control	Automatic
Rated operational voltage Ue (V)	250/400VAC
Number of main contacts	1P: 1NO,1NC; 2P: 1NO+1NC, 2NO,2NC 3P: 3NO,3NC; 4P: 2NO+2NC, 3NO+1NC, 4NO, 4NC
Rated impulse withstand voltage Uimp (V)	4kV
Rated operational currents Ie (A)	16-125A (AC-7a), 6-50A (AC-7b)
Rated frequency (Hz)	50/60Hz
Utilization category	AC-7a/AC-7b
Rated control supply voltage Us	AC24V; AC110V; AC220-240V
Mechanical life (times)	10 × 10 ⁶
Electrical life (times)	10 × 10 ⁵

EKMF7 Modular AC/DC Contactor



Standard	IEC61095, IEC60947-4-1
Poles	1P, 2P, 3P, 4P
Method of control	Automatic
Rated operational voltage Ue (V)	250/400VAC
Number of main contacts	1P: 1NO,1NC; 2P: 1NO+1NC, 2NO,2NC 3P: 3NO,3NC; 4P: 2NO+2NC, 3NO+1NC, 4NO, 4NC
Rated impulse withstand voltage Uimp (V)	4kV
Rated operational currents Ie (A)	16-63A (AC-1/AC-7a), 6-25A (AC-3/AC-7b)
Rated frequency (Hz)	50/60Hz
Utilization category	AC-1/AC-7a; AC-3/AC-7b
Rated control supply voltage Us	12V, 24V, 48V, 110V, 230V AC/DC
Mechanical life (times)	10 × 10 ⁶
Electrical life (times)	10 × 10 ⁵

EKCS101
Changeover Switch



Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	16, 25, 32, 40A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Contact form	I-0-II
Electrical life	1,500 Cycles
Mechanical life	8,500 Cycles

EKCS101H
Changeover Switch



Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	16, 25, 32, 40, 63, 80A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Contact form	I-0-II
Electrical life	1,500 Cycles
Mechanical life	10,000 Cycles

EKCS101G Changeover Switch



Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	63, 80, 100, 125A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Contact form	I-0-II
Electrical life	1,500 Cycles
Mechanical life	8,500 Cycles

EKCS201 Changeover Switch



Standard	IEC/EN60947-3
No.of poles	1P, 2P, 3P, 4P
Rated currents (In)	16, 25, 32, 40A
Rated voltage (Ue)	240/415V~
Rated frequency	50/60Hz
Contact form	I-0-II
Electrical life	1,500 Cycles
Mechanical life	8,500 Cycles

EKMV

Modular Voltage Meter



Standard	IEC60051-1
Terminal for wiring	Single phase L+N, Three phase 3L+3N
Measurement voltage range	AC 80V~500V
Rated frequency	50/60Hz
Working current	≤20mA
Measuring accuracy	1.0
Measuring rate	>200MS/time
Protection degree	IP20
Electrical Life	≥15000 hours

EKSL

Modular Signal Lamp



Standard	IEC60947-5-1
Number of poles	1P
Rated operational current	≤20mA
Rated operational voltage (Ue)	230V AC, 100V AC or 48V AC/DC, 24V AC/DC
Rated insulation voltage (Ui)	500V
Rated frequency	50/60Hz
Colour	EKSL1: Red, Green, Yellow EKSL3: Red/Green/Yellow, Red/Green/Blue
Connection capacity	Rigid conductor 1.5mm ²
Max power	0.6W
Life	LED ≥30000h

Fuse Link and Fuse Disconnecter

Fuses serve as crucial electrical safety devices, offering overcurrent protection for circuits and preventing electrical fires and damage to appliances. They are commonly utilized in residential, commercial, and industrial electrical systems.

ETEK Electric provides a diverse selection of fuse types for AC power distribution systems and photovoltaic applications, such as NH fuses and cylindrical fuses. Additionally, we offer various fuse holders to accommodate different installation requirements.



EKF1 Modular Fuse Holder



AC Fuse

Standard	IEC60269-3
Product item	RT18 Fuse Holders
Rated current	32, 63, 125A
Rated voltage (Ue)	250/500/690VAC
Rated insulation voltage (Ui)	500/800VAC
Pole	1P, 2P, 3P, 4P, 1P+N, 3P+N
Fuse size	10×38mm, 14×51m, 22×58mm
Applications	Industrial Control Cabinets
Operation mode	Direct Front or External Operation Handle
Protection degree	IP20
Mounting method	Din-rail

EKFL Modular Fuse Link



Standard	IEC60269-2
Material	Porcelain, Copper
Product item	RT18-32, RT18-63, RT18-125
Size	10×38mm, 14×51m, 22×58mm
Utilization category	gL/gG
Rated current	2-125A
Rated voltage Ue	500/690VAC
Breaking capacity (kA)	100kA(500VAC)/50kA(690VAC)
Applications	Power control system, industry electrical equipment

NH NH Fuse Series



Model	NH00C	NH00	NH0	NH1	NH2	NH3	NH4
Rated voltage	500VAC, 690VAC						
Rated current	2-100A	50-160A	20-160A	50-250A	250-400A	315-630A	500-1250A
Breaking capacity	500VAC			120kA			
	690VAC			50kA			
Rated frequency	50Hz						
Utilization category	gG/gL						
Pollution level	Level 3						
Installation category	Class III						

EKPV NH Series gPV Fuse



Standard	IEC60269-6						
Model	EKPV-H00	EKPV-H1	EKPV-H2	EKPV-H3	EKPV-H1XL	EKPV-H2XL	EKPV-H3L
Rated voltage	1000VDC				1500VDC		
Rated current	32-100A	50-160A	125-250A	250-400A	63-200A	125-250A	250-400A
Breaking capacity	50kA						
Utilization category	gPV						
Ambient temperature	-40°C to +75°C, Max.90% humidity						
Altitude	≤2000m						

EKF1

Fuse Switch Disconnecter



Standard	IEC60269-6, IEC60947-3		
Model	EKF1-10(X)PV	EKF1-10(X)PVH	EKF1-15(X)PV
Fuse Link Size	10×38mm	10×38mm	10×85mm, 14×85mm
Versions	Without indicator, LED indicator		
Rated voltage	1000VDC	1000VDC	1500VDC
Rated current	32A	32A	50A
Rated insulation voltage (Ui)	1000V	1000V	1500V
Rated imp. withstand voltage (Uimp)	6kV		
Utilization category	DC-20B, PV-0		
Degree of protection	IP20		
Ambient temperature	-20°C to 55°C		
Storage temperature	-25°C to 70°C		

EKFL

gPV Cylindrical Fuse Link




Standard	IEC60269-6		
Core size	10×38mm	10×85mm	14×85mm
Rated voltage	1000V	1500V	1500V
Rated current	2-32A	2-35A	25-50A
Utilization category	gPV		
Breaking capacity	30kA	50kA	30kA

Surge Protective Device

Surge Protection Devices (SPDs) are designed to protect electrical and electronic equipment from transient surge conditions, such as voltage spikes and surges caused by lightning, power anomalies, or other electrical disturbances. These devices work by limiting the voltage supplied to an electric device by either blocking or redirecting the surge current to the ground, thus preventing damage to the equipment, and ensuring its safety.

ETEK Electric offers a range of surge protectors that are designed to protect against AC or DC surges. We provide three diverse types of surge protectors, which include T1, T1+T2, and T2.

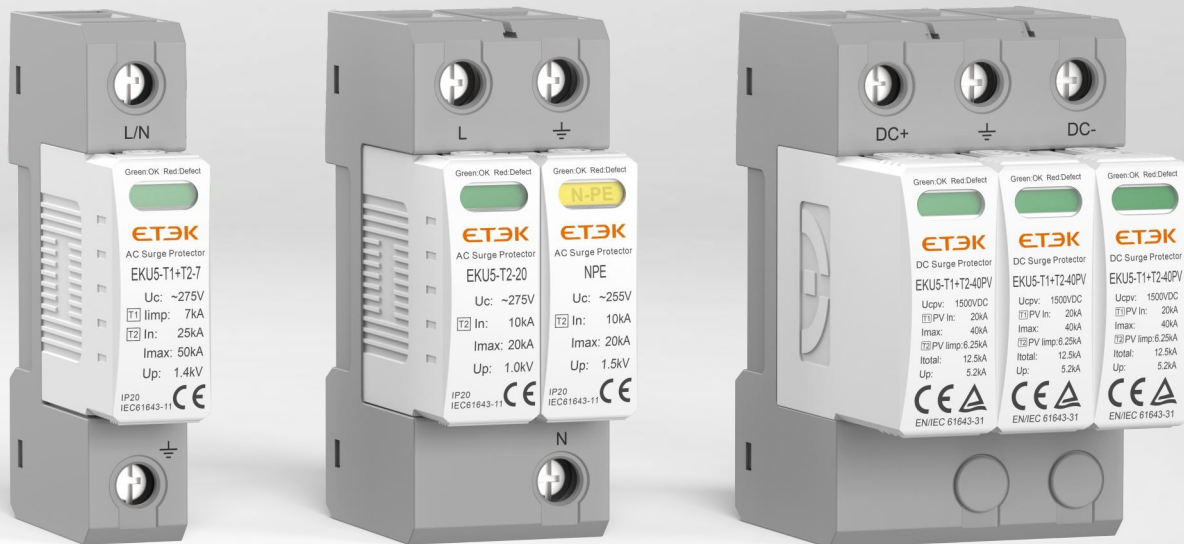

EKU5-T1+T2-7

Surge Protective Device



IEC/EN Category: Class I+II / Type 1+2

Standard	IEC/EN61643-11				
No. of Poles	1P, 2P, 3P, 4P, 1P+NPE, 3P+NPE				
Max. continuous operating a.c.voltage (Uc)	150V	275V	320V	385V	440V
Max. continuous operating a.c.voltage (N-PE)(Uc)	255V				
Lightning impulse current (10/350μs)(Iimp)	7kA				
Norminal discharge current (8/20μs)(In)	25kA				
Maximum discharge current (8/20μs)(Imax)	50kA				
Voltage protection level (Up)	≤1.2kV	≤1.4kV	≤1.6kV	≤1.8kV	≤2.0kV
Voltage protection level 5kA (Up)	≤1.0kV	≤1.2kV	≤1.4kV	≤1.5kV	≤1.6kV
Voltage protection level (N-PE)(Up)	≤1.5kV				

EKU5-T1+T2-12

Surge Protective Device



IEC/EN Category: Class I+II / Type 1+2

Standard	IEC/EN61643-11			
No. of Poles	1P, 2P, 3P, 4P, 1P+NPE, 3P+NPE			
Max. continuous operating a.c.voltage (Uc)	150V	275V	320V	385V
Max. continuous operating a.c.voltage (N-PE)(Uc)	255V			
Lightning impulse current (10/350μs)(Iimp)	12.5kA			
Norminal discharge current (8/20μs)(In)	30kA			
Maximum discharge current (8/20μs)(Imax)	60kA			
Voltage protection level (Up)	≤1.2kV	≤1.5kV	≤1.6kV	≤1.8kV
Voltage protection level 5kA (Up)	≤0.6kV	≤1.0kV	≤1.2kV	≤1.3kV
Voltage protection level (N-PE)(Up)	≤1.5kV			

EKU5-T2-20 Surge Protective Device



IEC/EN Category: Class II / Type 2

Standard	IEC/EN61643-11				
No. of Poles	1P, 2P, 3P, 4P, 1P+NPE, 3P+NPE				
Max. continuous operating a.c.voltage (Uc)	150V	275V	320V	385V	440V
Max. continuous operating a.c.voltage (N-PE)(Uc)	255V				
Norminal discharge current (8/20μs)(In)	10kA				
Maximum discharge current (8/20μs)(Imax)	20kA				
Voltage protection level (Up)	≤0.8kV	≤1.0kV	≤1.2kV	≤1.45kV	≤1.6kV
Voltage protection level 5kA (Up)	≤0.5kV	≤0.8kV	≤1.0kV	≤1.2kV	≤1.4kV
Voltage protection level (N-PE)(Up)	≤1.5kV				

EKU5-T2-40 Surge Protective Device



IEC/EN Category: Class II / Type 2

Standard	IEC/EN61643-11				
No. of Poles	1P, 2P, 3P, 4P, 1P+NPE, 3P+NPE				
Max. continuous operating a.c.voltage (Uc)	150V	275V	320V	385V	440V
Max. continuous operating a.c.voltage (N-PE)(Uc)	255V				
Norminal discharge current (8/20μs)(In)	20kA				
Maximum discharge current (8/20μs)(Imax)	40kA				
Voltage protection level (Up)	≤0.8kV	≤1.3kV	≤1.5kV	≤1.8kV	≤2.0kV
Voltage protection level 5kA (Up)	≤0.6kV	≤1.0kV	≤1.2kV	≤1.4kV	≤1.6kV
Voltage protection level (N-PE)(Up)	≤1.5kV				

EKU6-T2-40S

Surge Protective Device



IEC/EN Category: Class II / Type 2

Standard	IEC/EN61643-11
No. of Poles	1P+NPE
Max. continuous operating a.c.voltage (L-N)(Uc)	275V
Max. continuous operating a.c.voltage (N-PE)(Uc)	255V
Norminal discharge current (8/20μs)(In)	20kA
Maximum discharge current (8/20μs)(Imax)	40kA
Voltage protection level (L-N)(Up)	≤1.5kV
Voltage protection level 5kA (Up)	≤1.0kV
Voltage protection level (N-PE)(Up)	≤1.5kV

EKU5-T2-20PV

Surge Protective Device



IEC/EN Category: Class II / Type 2

Standard	IEC/EN61643-31				
No. of Moudles	2P(2Mods), 3P(3Mods)				
Max. continuous operating a.c.voltage (Ucpv)	600V	800V	1000V	1500V	
Norminal discharge current (8/20μs)(In)	10kA				
Maximum discharge current (8/20μs)(Imax)	20kA				
Voltage protection level DC+/DV-to PE (Up)	2Mods	2.6kV	3.5kV	4.0kV	-
	3Mods	-	-	4.0kV	5.2kV

EKU5-T2-40PV Surge Protective Device



IEC/EN Category: Class II / Type 2

Standard		IEC/EN61643-31			
No. of Moudles		2P(2Mods), 3P(3Mods)			
Max. continuous operating a.c.voltage (Uc _{pv})		600V	800V	1000V	1500V
Norminal discharge current (8/20μs)(I _n)		20kA			
Maximum discharge current (8/20μs)(I _{max})		40kA			
Voltage protection level DC+/DV-to PE (Up)	2Mods	2.6kV	3.5kV	4.0kV	-
	3Mods	-	-	4.0kV	5.2kV

EKU5-T1+T2-40PV Surge Protective Device



IEC/EN Category: Class I+II / Type 1+2

Standard		IEC/EN61643-31	
No. of Moudles		3P(3Mods)	
Max. continuous operating a.c.voltage (Uc _{pv})		1000V	1500V
Impulse discharge current (10/350 us)(I _{imp})		6.25kA	
Total discharge current (10/350 us)(I _{imp})		12.5kA	
Norminal discharge current (8/20μs)(I _n)		20kA	
Maximum discharge current (8/20μs)(I _{max})		40kA	
Voltage protection level DC+/DV-to PE (Up)		4kV	5.2kV

Molded Case Circuit Breaker

Molded Case Circuit Breaker (MCCB) is a protective device that can stop the flow of current automatically when the current exceeds the trip setting. MCCBs are used in various applications where heavy current flows, such as industrial, commercial, and high-rise residential buildings.

ETEK Electric offers molded case circuit breakers of several types and sizes, including thermal magnetic fixed, thermal-magnetic adjustable and electronically adjustable. These circuit breakers are rated up to 2000A, providing flexibility for different use cases.



EKM7 1140V MCCB

High Voltage Moulded Case Circuit Breaker



Standard		IEC/EN60947-2				
Model		EKM7-320			EKM7-630	
Pole number		3P			3P	
Rated current (A)		16,20,25,32,40,50,63,75,80,100,125,140,160,180,200,225,250,320			225,250,320,350,400,500,630	
Rated voltage (V)		AC380/415V	AC690V	AC800V	AC1000V	AC1140V
Rated insulation voltage (V)		1200V				
Short-circuit breaking capacity (KA) _{Icu=Ics}	H	100	65	50	30	20
	M	-	60	50	20	12
Electrical life		5000	3000	3000	1000	1000
Mechanical life		15000				

EKM7DC 1500V DC MCCB

DC Moulded Case Circuit Breaker



Standard		IEC/EN60947-2			
Model		EKM7DC-320	EKM7DC-400	EKM7DC-630	EKM7DC-1600
Pole number		2P	2P	2P	3P,4P
Rated current (A)		100,125,140,160,180,200,225,250,280,315,320	250,315,350,400	400,500,630	800,1000,1250,1500,1600
Rated voltage (V)		DC750, DC1000, DC1200, DC1500			
Rated insulation voltage (V)		1600			
Short-circuit breaking capacity (KA) _{Icu=Ics}	DC750V	85	85	85	50
	DC1000V	50	50	50	30
	DC1200V	35	35	35	15
	DC1500V	20	20	20	10

EKM8 MCCB

Thermal-magnetic Fixed Type



Standard		IEC/EN60947-2								
Frame size (A)		125			160			250		
Rated current (A)		10,16,20,25,32,40,50,63,80,100,125			16,20,25,32,40,50,63,80,100,125,160			100,125,140,160,180,200,225,250		
Rated insulation voltage (V)		1000								
Impulse withstand voltage Uimp(kV)		8k								
Rated operational voltage (V)		230(1P); 240(3P/4P); 400(2P/3P/4P); 690(3P/4P)			230; 400; 690			230; 400; 690		
Breaking capacity code		C	S	H	C	S	H	C	S	H
Pole number		1P, 2P, 3P, 4P			2P, 3P, 4P		3P, 4P	3P, 4P		
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	15/10	25/18	35/25	30/20	40/28	50/35	30/20	40/28	50/35
	400/415V	10/7.5	18/15	25/18	15/10	25/18	35/25	15/10	25/18	35/25
	600/690V	5/3	6/4	8/8	6/4	8/4	8/8	6/4	8/4	8/8
Electrical life		1500						1000		
Mechanical life		8500						7000		

Standard		IEC/EN60947-2				
Frame size (A)		400	630	800	1250	2000
Rated current (A)		250,315,350,400	400,500,630	500,630,700,800	630,700,800,1000,1250	1000,1250,1600,2000
Rated insulation voltage (V)		1000				
Impulse withstand voltage Uimp(kV)		8				
Rated operational voltage (V)		400; 690				
Breaking capacity code		H	H	H	H	H
Pole number		3P, 4P				
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	75/50	75/50	85/60	85/60	100/85
	400/415V	50/35	50/35	65/50	65/50	85/50
	600/690V	10/10	10/10	15/15	15/15	25/25
Electrical life		1000			500	
Mechanical life		4000			2500	

EKM8T MCCB

Thermo-magnetic Double Adjustable Type



Standard		IEC/EN60947-2								
Frame size (A)		125			160			250		
Rated current (A)		20,32,25,40,50,63,80,100,125			20,25,32,40,50,63,80,100,125,160			160,180,200,225,250		
Rated insulation voltage (V)		1000								
Impulse withstand voltage Uimp(kV)		8								
Rated operational voltage (V)		400								
Breaking capacity code		C	S	H	C	S	H	C	S	H
Pole number		3P, 4P								
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	15/10	25/18	35/25	30/20	40/28	50/35	30/20	40/28	50/35
	400/415V	10/7.5	18/15	25/18	15/10	25/18	35/25	15/10	25/18	35/25
	600/690V	5/3	6/4	8/8	6/4	8/4	8/8	6/4	8/4	8/8
Electrical life		1500						1000		
Mechanical life		8500						7000		

Standard		IEC/EN60947-2			
Frame size (A)		400	630	800	1250
Rated current (A)		315,350,400	320,350,400,500,630	630,700,800	630,700,800,1000,1250
Rated insulation voltage (V)		1000			
Impulse withstand voltage Uimp(kV)		8			
Rated operational voltage (V)		400			
Breaking capacity code		H	H	H	H
Pole number		3P, 4P			
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	75/50	75/50	85/60	85/60
	400/415V	50/35	50/35	65/50	65/50
	600/690V	10/10	10/10	15/15	15/15
Electrical life		1000		500	
Mechanical life		4000		2500	

EKM8E MCCB

Electronic Adjustable Type




Standard		IEC/EN60947-2					
Frame size (A)		160		250		400	600
Rated current (A)		32, 63, 100, 125, 160		160, 250		400	500, 630
Rated insulation voltage (V)		1000					
Impulse withstand voltage Uimp(kV)		8					
Rated operational voltage (V)		AC400, AC690					
Breaking capacity code		S	H	S	H	H	H
Pole number		3P, 4P					
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	40/28	50/35	40/28	50/35	75/50	75/50
	400/415V	25/18	35/25	25/18	35/25	50/35	50/35
	600/690V	8/4	8/8	8/4	8/8	10/10	10/10
Electrical life		1500				1000	
Mechanical life		8500				4000	

Standard		IEC/EN60947-2			
Frame size (A)		800	1250	1600	2000
Rated current (A)		630, 800	630, 800, 1000, 1250	800, 1000, 1250, 1600	1000, 1250, 1600, 2000
Rated insulation voltage (V)		1000			
Impulse withstand voltage Uimp(kV)		8			
Rated operational voltage (V)		400			
Breaking capacity code		H	H	H	H
Pole number		3P, 4P			
Short-circuit breaking capacity (KA)Icu/Ics	230/240V	85/60	85/60	100/85	100/85
	400/415V	65/50	65/50	85/50	85/50
	600/690V	15/15	15/15	25/25	25/25
Electrical life		500			
Mechanical life		2500			

Air Circuit Breaker

Air Circuit Breaker (ACB) is a type of circuit breaker that utilizes air as the medium to extinguish the arc generated during a fault condition in an electrical circuit. It provides protection to electrical devices and circuits from damage caused by overcurrent or short circuit and is typically employed in low voltage applications below 1000V, commonly found in distribution panels.

At ETEK Electric, we offer EKW6 Series air circuit breakers with a current rating of up to 6300A, ensuring that you have access to high-quality electrical protection devices that meet your needs.

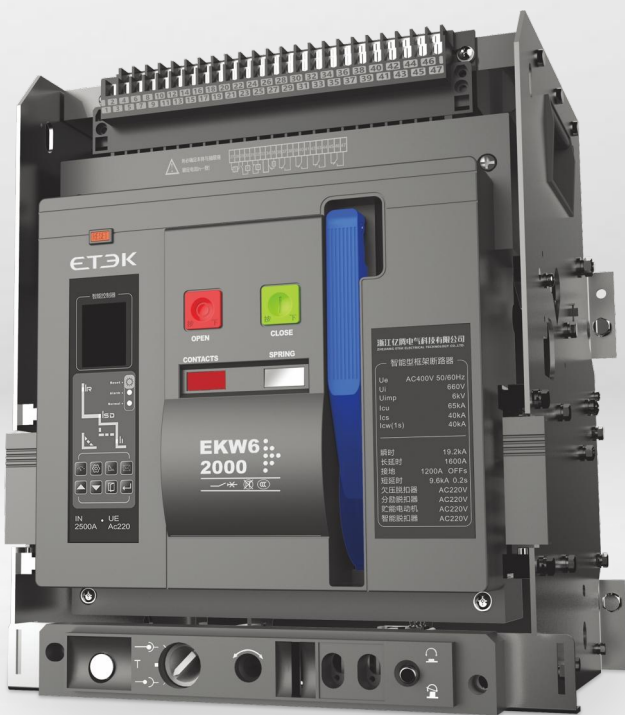

EKW6 ACB

Air Circuit Breaker



Model		EKW6-1600/ 1600G	EKW6-2000/ 2000G	EKW6-3200	EKW6-4000	EKW6-5000
Rated current of frame level Inm(A)		1600	2000	3200	4000	5000
Number of poles		3, 4P				
Rated current In(A)		200,400,630,800, 1000,1250,1600	400,630,800,1000, 1250,1600,2000	2000,2500,2900, 3200	3200,3600,4000	4000,5000,6300 (Capacityincrease)
Rated voltage Ue(V)		400, 690				
Insulation voltage Ui(V)		1000				
Rated frequency (Hz)		50/60				
Impulse withstand voltage Uimp(kV)		12				
Rated current of N-pole IN(A)		50%In/100%In				
Rated ultimated short Circuit breaking capacity Icu(kA)	AC400V	55/65	65/80	100	100	120
	AC690V	35/50	50	65	85	75
Rated short circuit breaking capacity Ics(kA)	AC400V	55/65	40/50	65	100	100
	AC690V	35/55	40	50	85	75
Rated short circuit making capacity Icm(kA)(Peak)/cosφ	AC400V	110/143	176/0.2	220/0.2	364	264/0.2
	AC690	73.5/105	105/0.25	143/0.2	165	187/0.2
Rated short time with stand current Icw(1s)	AC400V	42/50	40/50	65	100	85/100(MCR)
	AC690V	35/42	40	50	85	65/75(MCR)
Max total tripping time(ms) without time delay		8-12				
Closing time(ms)		Max 60				
Electrical life	AC400V	1000	500			
	AC690V	1000	500			
Mechanical life	Maintenance free	2500			2000	
	Maintenance required	5000	10000		8000	
Connection mode		Horizontal, Vertical				

Electrical Control Devices

ETEK Electric provides a variety of electrical control products, such as AC contactors, thermal overload relays, motor protection circuit breakers (MPCB), DOL starter, etc. These products can effectively protect motors and electrical equipment from overload, short circuits, and other electrical faults.

ETEK Electric are committed to providing customers with high-quality electrical control products to ensure the stable operation of our customers' equipment.



EKC2

AC Contactor



Standard		IEC/EN60947-4-1, IEC/EN60947-5-1					
Model No.		EKC2-09	EKC2-12	EKC2-18	EKC2-25	EKC2-32	EKC2-38
Poles		3P					
Rated conventional Heating current (A)	Ith	20	20	32	40	50	50
Rated voltage (V)	Ui	690					
Rated operation current Ue=380/415V (A)	AC-3 Ie	9	12	18	25	32	38
	AC-4 Ie	3.5	5	7.7	8.5	12	14
Power controlled 3ph cage motor AC-3 (KW)	220/240V	2.2	3	4	5.5	7.5	8.9
	380/415V	4	5.5	7.5	11	15	18.5
	660/690V	5.5	7.5	10	15	18.5	18.5
Electrical life (x10 ³ operations)	AC-3	1100				900	
	AC-4	220					
Mechanical life (x10 ⁶ operations)		12			10		
Main contact		3NO					
Bulit-in auxiliary contact		1NO+1NC					

Standard		IEC/EN60947-4-1, IEC/EN60947-5-1				
Model No.		EKC2-40	EKC2-50	EKC2-65	EKC2-80	EKC2-95
Poles		3P				
Rated conventional Heating current (A)	Ith	60	80	80	100	125
Rated voltage (V)	Ui	690				
Rated operation current Ue=380/415V (A)	AC-3 Ie	40	50	65	80	95
	AC-4 Ie	18.5	24	28	37	44
Power controlled 3ph cage motor AC-3 (KW)	220/240V	11	15	18.5	22	25
	380/415V	18.5	22	30	37	45
	660/690V	30	33	37	45	45
Electrical life (x10 ³ operations)	AC-3	900			650	
	AC-4	170			110	
Mechanical life (x10 ⁶ operations)		9			6.5	
Main contact		3NO				
Bulit-in auxiliary contact		1NO+1NC				

EKR2 Thermal Overload Relay



Standard	IEC60947-4-1
Poles	3P
Rated operational voltage (Ue)	415V
Method of control	Automatic & manual
Tripping class	10A
Adjusting range of Rated current	0.1-93
Rated insulation voltage (Ui)	690VAC
Rated impulse withstand voltage (Uimp)	6kV
Signalling	Trip indicator
Tightening torque	0.8 N.m
Degree of protection	IP20
Ambient air temperature	-5°C to +40°C, max. 95%humidity
Storage temperature	-40°C to +75°C
Mounting	Directly under the contactor
No. of contacts	1NO+1NC
Matched contactor model	EKC2

EKMS2

Motor Protection Circuit Breaker



Standard	IEC60947-2, IEC60947-4-1
Handle type	Rocker, Rotary
Poles	3P
Rated operational voltage (Ue)	380/400/415V
Rated operating frequency	50/60Hz
Frame size rated current (In)	32A, 80A
Rated insulation voltage (Ui)	690V
Rated impulse withstand voltage (Uimp)	6kA
Utilization Category	AC-3
Trip class	10A
Tripping device	Thermal-Magnetic
Trip Indicator	Yes
Degree of Protection	IP 20, IP55 with enclosure
Electrical life in AC-3 (times)	10000
Mechanical life (times)	20000
Terminal type	Screw
Rated operational system	Continuous operational system
Ambient air temperature	- 5°C to +40°C, max. 95% humidity
Maximum operating altitude (meters)	≤2000
Accessories	Auxillary Contact, Alarm Contact, ShunntRelease, Under Voltage release

EKQ1 & EKQ2

Direct On Line (DOL) Starter



Model	EKQ1	EKQ2
Standard	IEC60947-4-1	
Electric rating	9,18,25,32,40,50,65,80,95A	
Rated operational voltage (Ue)	660V	
Rated insulation voltage (Ui)	690V	
Rated frequency	50/60Hz	
Rated impulse with stand voltage (Uimp)	8kV	
Control button	Green Start button; Red Stop/ Reset button	
Enclosure	EKQ1-09/18/25/32 Frame ABS upper cover, Metal base, IP55	EKQ2-09/18/25/32 Frame ABS insulated, IP55
	EKQ1/EKQ2-40/50/80/95 Frame Metal, IP40	
Electrial life ($\times 10^5$ times)	5	
Mechanical life ($\times 10^5$ times)	10	
Matched AC contactor type	EKC1 Series	EKC2 Series
Matched Thermal relay type	EKR2 Series	
Ambient air temperature (°C)	-5°C to +40°C, max. 95%humidity	
Storage temperature (°C)	-40°C to +75°C	
Max operating altitude	$\leq 2000\text{m}$	

Distribution Box

The distribution box acts as distributor of electrical power within a building. Also referred to as a distribution board, panel board, breaker panel, or electric panel, it serves as the central electrical supply system for any property. As a key component of an electrical system, the distribution box divides electrical power into subsidiary circuits and provides a protective fuse or circuit breaker for each circuit.

ETEK Electric provides various plastic and metal types of distribution boxes, which are widely used in buildings, squares, stations, industrial and mining, photovoltaic applications and other places.



EKDB2

Plastic Distribution Box



Standard	IEC62208
No.of modules	2,3,4,6,8,10,12,15,18,24,36
No.of rows	1 row for 2,3,4,6,8,10,12,15,18 modules
	2 rows for 24,36 modules
Rated current In(A)	63,100A
Color	White RAL 9003 and Grey RAL 7035
Color of door	Brown
Mounting type	Surface and Flush
Degree of protection	IP40
Material	ABS for shell, PC Door
Ambient temperature	-5°C to +40°C, max. 95% humidity
Storage temperature	-40°C to +75°C

EKDB4

Plastic Waterproof Distribution Box



Standard	IEC62208
No.of modules	4,6,8,12,18,24
No.of rows	1 row for 4,6,8,12,18 modules
	2 rows for 24 modules
Rated current In(A)	63,100A
Color	Grey RAL 7035
Color of door	Transparent
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK08
Material	PC for shell and door
Ambient temperature	-5°C to +40°C, max. 95% humidity
Storage temperature	-40°C to +75°C

EKDB4S

Plastic Waterproof Distribution Box



Standard	IEC62208
No.of modules	6,9,12,18,24,36
No.of rows	1 row for 6,9,12,18 modules
	2 rows for 24,36 modules
Rated current In(A)	63,100A
Color	Grey RAL 7035
Color of door	Transparent
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK08
Material	PC for shell and door
Ambient temperature	-5°C to +40°C, max. 95% humidity
Storage temperature	-40°C to +75°C

EKDB9

Plastic Waterproof Distribution Box



Standard	IEC60529
No.of modules	5,8,12,15,18
No.of rows	1 row
Color	White RAL 9003
Color of door	Transparent
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK08
Material	ABS for Shell, PC for Door
Ambient temperature	-5°C to +40°C, max. 95% humidity
Storage temperature	-40°C to +75°C

EKDB10

Plastic Waterproof Distribution Box



Standard	IEC60529
No. of modules	4,6,9,13,15,18,26
No. of rows	1 row for 4,6,9,13,15,18 modules
	2 rows for 26 modules
Color	White RAL 9003
Color of door	Transparent
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK09
Material	PC for shell and door
Ambient temperature	-5°C to +40°C, max. 95% humidity
Storage temperature	-40°C to +75°C

HA

Plastic Waterproof Distribution Box



Standard	IEC60529
No. of modules	4,8,12,18,26
No. of rows	1 row for 4,8,12,18 modules
	2 rows for 26 modules
Color	Grey RAL 7035
Color of door	Transparent
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK10
Material	ABS for shell, PC for door
Ambient temperature	-25°C to +55°C, max. 95% humidity
Storage temperature	-40°C to +75°C

EKDB7

Metal Distribution Box



Standard	IEC62208	
Phase	Single Phase	Three Phase
No.of modules	1x16,2x16,3x16,4x16,5x16,6x16	4,6,8,10,12
No.of rows	1,2,3,4,5,6	/
Color	Grey	
Color of door	Grey	
Mounting type	Surface and Flush	
Degree of protection	IP40	
Mechanical impact	IK05	
Material	Steel	
Ambient temperature	-5°C to +40°C	
Storage temperature	-40°C to +75°C	

EKDB8


Metal Distribution Box



Standard	IEC62208
Rated current	63-1250A
Dimensions	Height: from 200 mm to 1400mm
	Width: from 200mm to 1200mm
	Depth: 150mm/200mm/250mm/300mm/400mm
Color	Grey
Color of door	Grey
Mounting type	Surface
Degree of protection	IP65
Mechanical impact	IK05
Material	Steel
Ambient temperature	-5°C to +40°C
Storage temperature	-40°C to +75°C

EKDB11

Plug-in Type Metal Distribution Box

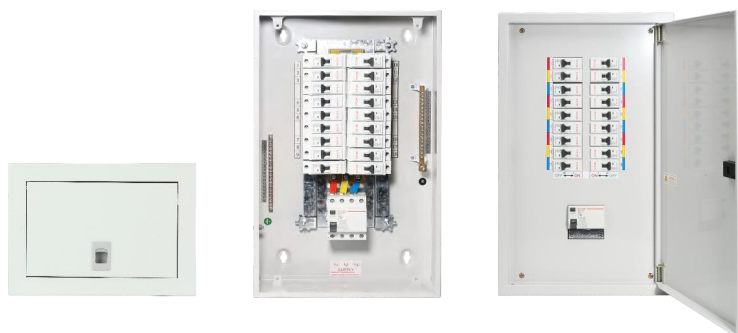

Standard	IEC61439-3	
Model	EKDB11-S	EKDB11-T
Phase	Single Phase	Three Phase
No.of modules	4,6,8,10,12	
Main switch	RCCB, Isolator	MCB, RCCB, MCCB, Isolator
Busbar rating	63,100,125A	
Color	Grey	
Color of door	Grey	
Mounting type	Surface	
Degree of protection	IP40	
Mechanical impact	IK05	
Material	Steel	
Ambient temperature	-5°C to +40°C	
Storage temperature	-40°C to +75°C	

EKDB16

Metal Distribution Box



Standard	IEC62208	
No.of modules	6,10,14,18,24,28,36	
No.of rows	1 rows for 6,10,14,18,24 modules	
	2 rows 28,36 modules	
Color	Grey	
Color of door	Grey	
Mounting type	Surface	
Degree of protection	IP40	
Mechanical impact	IK05	
Material	Steel	
Ambient temperature	-5°C to +40°C	
Storage temperature	-40°C to +75°C	

EKDBS

Plastic PV Combiner Box



String in/String out	1/1, 2/1, 2/2, 3/1, 3/2, 3/3, 4/1, 4/2, 5/1, 5/2, 6/2		
Maximum Voltage	500V	600V	1000V
Max Current Input (Eachstring)	20A	32A	32A
Max Current Output (Eachstring)	63A	32A	63A
Output Switch	DC MCB / DC Isolator		
Protection	Surge protection, Short circuit protection, Ground protection		
Installation method	Wall-mounted		
Material of enclosure	ABS for shell, PC for door		
Degree of protection	IP65		
Mechanical impact	IK10		
Ambient temperature	-25°C to +55°C, max. 95% humidity		
Storage temperature	-40°C to +75°C		

EKDBT


Metal PV Combiner Box



String in/String out	4/1, 4/2, 6/1, 6/2, 8/1, 8/2, 10/1, 12/1, 12/2, 16/1, 18/1, 20/1, 24/1	
Maximum Voltage	1000V	1500V
Max Current Input (Eachstring)	63A	25A
Max Current Output (Eachstring)	250A	400A
Output Switch	DC MCB / DC Isolator / DC Load Disconnecter / DC MCCB	
Protection	Surge protection, Short circuit protection, Ground protection	
Installation method	Wall-mounted	
Material of enclosure	Metal	
Degree of protection	IP65	
Mechanical impact	IK05	
Ambient temperature	-25°C to +55°C, max. 95% humidity	
Storage temperature	-40°C to +75°C	

Notes

A series of horizontal dashed lines for writing notes.

 The product data referred to in the company shall be subject to material object. Subject to change without notice.
The company has the final right to interpret.

 Green paper printing.

Tel-
0086-577-62780116

Fax-
0086-577-62774090

Email-
info@etek-china.com

No. 288 Wei 17th Road,
Economic Development Zone,
Yueqing City Zhejiang China.

ETEK[®]
E TEK ELECTRIC

ZHEJIANG ETEK
ELECTRICAL TECHNOLOGY CO.,LTD.

