

8097

型防爆防腐控制按钮

8097 type
explosion-proof control push button series





平钮头
Flat button



双键按钮头
Double key button



金属钥匙旋钮头
Metal key knob head



16款急停按钮头
16 type Emergency stop button



急停、自锁按钮头
Emergency self-locking button with key



带钥匙急停按钮头
Emergency stop button with key




长手柄旋钮头
Long handle rotary head



短手柄旋钮头
Short handle rotary head



Model:8097型防爆防腐控制按钮系列

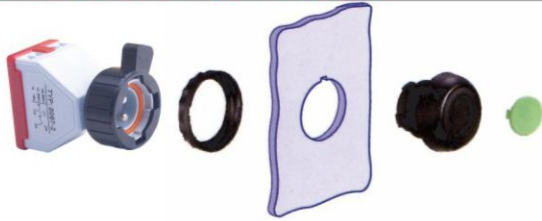

主要数据Main data

防爆标志: II 2G Ex de II C
 防爆标志: 用于1区和2区
 使用环境温度: $-55^{\circ}\text{C} \leq \text{Ta} \leq 60^{\circ}\text{C}$
 防护等级: IP20
 额定电压: 250V 250V 110V 24V
 使用类别: AC12 AC15 DC13 DC13
 额定电流: 16A 10A 0.5A 1A
 环境温度: $\text{Ta} \leq 40^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$
 接线端子: $2 \times 2.5\text{mm}^2$
 机械寿命: 100万次
 板后型安装: 在1-6mm面板上
 符合标准: IEC60079 EN60079
 符合: 0575

 Ex mark: II 2G Ex de II C
 Intended use: L hazardous areas zone 1,2
 Usage Ambient temperature: $-55^{\circ}\text{C} \leq \text{Ta} \leq 60^{\circ}\text{C}$
 Degree of protection: Ip20
 Rated voltage: 250V 250V 110V 24V
 Usage class: AC12 AC15 DC13 Dc13
 Rated current: 16A 10A 0.5A 1A
 Ambient temperature: $\text{Ta} \leq 40^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$ $\text{Ta} \leq 60^{\circ}\text{C}$
 Connection terminal: $2 \times 2.5\text{mm}^2$
 Mechanical life: 1 million times
 Board back type mounting: on the board of 1 up to 6mm
 Standard: IEC60079 En60079
 Standard: 0575

规格Specifications

概述Summary

板后型防爆元件的前端操作头的标准直径为 $\Phi 30\text{mm}$, 安装在1-6mm面板上。信号灯、按钮和开关模块借助一个卡口连接到预先装好的前段操作头件上。板后型内装防爆元件安装在增强型Ex-e壳体内, 防护等级达到IP54以上。板后型内装防爆元件附带有接线端子。

◇按钮的标识牌符号、文字经烧结后可永久保留。
 ◇信号灯具有高亮度、寿命长等特点, 并设有温度开关, 确保安全温度。

◇前端操作头和内装元件用卡口夹紧。

The standard diameter of head of board back type is $\phi 30\text{mm}$, which is mounted on the board of 1 up to 6mm. The signal lamp, button and switch are connected to the pre-mounted front operation head part with a clamp. The explosion-proof component of board back type shall be mounted in the enclosure of increased safety "EX-e" which the protection degree is up to IP54. The explosion-proof component of board back type are attached by the terminals.

- The sintered signs and letters in the button remained forever.
- The features of explosion-proof signal lamp are high brightness, long life and etc, and equipped with the temperature switch, guarantees the safe temperature
- Front operation head and components are clamping by bayonet.

适用范围Scope of application

◇广泛用于石油开采、炼油、化工、军工等危险环境及海洋石油平台、游轮等场所;

- ◇适用于有高防腐要求场所;
- ◇适用于爆炸性气体环境1区、2区场所;
- ◇适用于II A、II B、II C类爆炸性气体环境;
- ◇适用于可燃油性粉尘环境21区、22区场所;
- ◇适用于T1~T6组温度组别。

- It is widely used in petroleum exploitation, refining, chemical industry, military industry and other dangerous environment, offshore oil platform, cruise ship and other places

- The places with high anti-corrosion requirements
- Explosive atmosphere: division 1&2
- Explosive atmosphere: Class
- Flammable dust atmosphere: zone 20,22
- Temperature classes: Class T1~T6

型号Type	图例Picture	颜色/规格 Color/specification	按钮触点 Push button contact
8097防爆防腐控制按钮 8097 type explosion-proof control push button			1NC/1NO
8097防爆防腐控制双键按钮 8097 type explosion-proof control push button with double key			2NC 2NO
8097防爆防腐急停按钮 8097 type explosion-proof emergency stop button			

16款

型号 Type	图例 Picture	颜色/规格 Color/specification	按钮触点 Push button contact
8097防爆防腐 急停按钮 8097 type explosion-proof Emergency stop button		板后型 board back type	$\begin{matrix} 11 & 23 \\ & \\ \hline 12 & 24 \end{matrix}$ 1NC/1NO
8097防爆防腐 带钥匙急停按钮 8097 type explosion-proof Emergency stop button with key		板后型 board back type	$\begin{matrix} 11 & 21 \\ & \\ \hline 12 & 22 \end{matrix}$ 2NC $\begin{matrix} 13 & 23 \\ & \\ \hline 14 & 24 \end{matrix}$ 2NO

外形尺寸 Outline dimension

防爆开关模块
Explosion-proof switch module
 63.3 (height), 49 (width)

平钮头
Flat button
 38 (width), 34.5 (width)

双键按钮头
Double key button
 56.5 (height), 49 (width)

16款急停按钮头
16 type emergency stop button
 36.5 (width), 34.5 (width)

急停按钮头
Emergency stop button
 16 (height), 63 (height), 54 (width), 80 (height)

带钥匙急停按钮头
Emergency stop button with key
 16 (height), 40 (height), 16 (height), 39 (width)

防爆开关模块(高)
Explosion-proof switch module(tall)

防爆开关模块(矮)
Explosion-proof switch module(short)

平钮头
Fat button
 40 (width)

双键按钮头
Double key button
 70 (width), 16 (height), 40 (height), 39 (width)

16款急停按钮头
16 type emergency stop button
 60.7 (height), 36.5 (width), 40 (width)

急停按钮头
Emergency stop button
 60.7 (height), 41.2 (height), 40 (width)

带钥匙急停按钮头
Emergency stop button with key
 84 (height), 60 (height), 36.5 (width), 40 (width), 16 (height)

Specifications 规格

型号 Type	图例 Picture	颜色/规格 Color/specification	标识牌 label	按钮触点 Push button contact									
			0 II	<table border="1"> <tr><td>0</td><td>11</td><td>23</td></tr> <tr><td>I</td><td>12</td><td>24</td></tr> <tr><td>II</td><td>12</td><td>24</td></tr> </table>	0	11	23	I	12	24	II	12	24
0	11	23											
I	12	24											
II	12	24											
			I 0 II	<table border="1"> <tr><td>I</td><td>13</td><td>23</td></tr> <tr><td>0</td><td>14</td><td>24</td></tr> <tr><td>II</td><td>14</td><td>24</td></tr> </table>	I	13	23	0	14	24	II	14	24
I	13	23											
0	14	24											
II	14	24											
			I 0 II	<table border="1"> <tr><td>I</td><td>13</td><td>23</td></tr> <tr><td>0</td><td>14</td><td>24</td></tr> <tr><td>II</td><td>14</td><td>24</td></tr> </table>	I	13	23	0	14	24	II	14	24
I	13	23											
0	14	24											
II	14	24											
			0 II	<table border="1"> <tr><td>0</td><td>11</td><td>23</td></tr> <tr><td>I</td><td>12</td><td>24</td></tr> <tr><td>II</td><td>12</td><td>24</td></tr> </table>	0	11	23	I	12	24	II	12	24
0	11	23											
I	12	24											
II	12	24											
			0 I	<table border="1"> <tr><td>0</td><td>13</td><td>23</td></tr> <tr><td>I</td><td>14</td><td>24</td></tr> <tr><td>II</td><td>14</td><td>24</td></tr> </table>	0	13	23	I	14	24	II	14	24
0	13	23											
I	14	24											
II	14	24											
			I II	<table border="1"> <tr><td>0</td><td>11</td><td>23</td></tr> <tr><td>I</td><td>12</td><td>24</td></tr> <tr><td>II</td><td>12</td><td>24</td></tr> </table>	0	11	23	I	12	24	II	12	24
0	11	23											
I	12	24											
II	12	24											
			0 · I	<table border="1"> <tr><td>0</td><td>11</td><td>23</td></tr> <tr><td>·</td><td>12</td><td>24</td></tr> <tr><td>I</td><td>12</td><td>24</td></tr> </table>	0	11	23	·	12	24	I	12	24
0	11	23											
·	12	24											
I	12	24											



长手柄
Long handle



短手柄
Short handle

8097防爆防腐
控制旋钮
8097 type explosion-proof
control rotary button


Outline dimension 外形尺寸



长手柄
Long handle



短手柄
Short handle

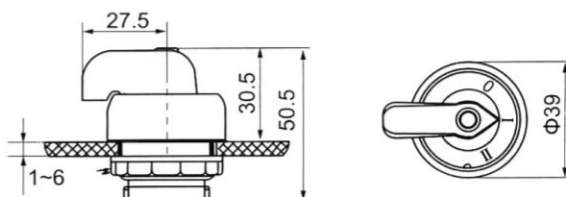

Specifications 规格

型号 Type	图例 Picture	颜色/规格 Color/specification	标识牌 label	按钮触点 Push button contact
			I II	
			0 I	
			0 I	
			I 0 II	
			I 0 II	
			I 0 II	
			0 I II	
			0 I II	
			0 · I	





8097防爆防腐
控制旋钮
8097 type explosion-proof
control rotary button

四极
4-pole

Outline dimension 外形尺寸



四极
4-pole



Model:8097型防爆防腐控制按钮系列 8097 type explosion-proof control push button series



Specifications 规格

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8097防爆防腐控制按钮-绿-电缆型 8097 type explosion-proof control push button - green - cable type</p>			 1NC/1NO  2NC  2NO
 <p>8097防爆防腐控制旋钮-电缆型 8097 type explosion-proof control rotary button - cable type</p>		二档/三档 two/ three gears	 1NC/1NO  2NC  2NO
 <p>8097防爆防腐急停按钮-电缆型 8097 type explosion-proof emergency stop button - cable type</p>			 1NC/1NO  2NC  2NO

Model:8097型/8095型防爆防腐控制按钮系列 8097/8095 type explosion-proof control push button series




Specifications 规格

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
---------	--------------------------	---------------------------	--------------------------



8097防爆防腐控制按钮
-不锈钢圈
8097 type explosion-proof control rotary button - cable type

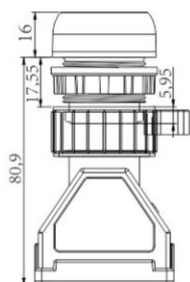


11 23
12 24 1NC/1NO

11 21
12 22 2NC

13 23
14 24 2NO



8097防爆防腐控制旋钮开关
-不锈钢圈
8097 type explosion-proof control rotary button - stainless steel ring

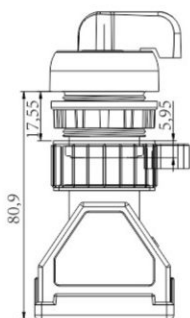

二档/三档
two/ three gears


11 23
12 24 1NC/1NO

11 21
12 22 2NC

13 23
14 24 2NO



8097防爆防腐控制急停按钮
-不锈钢圈
8097 type explosion-proof emergency stop button - stainless steel ring

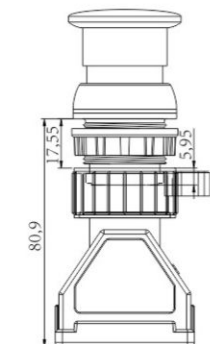




























11 23
12 24 1NC/1NO

11 21
12 22 2NC

13 23
14 24 2NO

Model:8097型/8095型防爆防腐控制按钮系列 8097/8095 type explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8095防爆防腐控制按钮-不锈钢圈 8095 type explosion-proof control push button-stainless steel ring</p>			 1NC/1NO  2NC  2NO
 <p>8095旋钮开关-不锈钢圈 8095 rotary switch - stainless steel ring</p>		二档/三档 two/ three gears	 1NC/1NO  2NC  2NO
 <p>8095防爆防腐急停按钮-不锈钢圈 8095 type explosion-proof Emergency stop button - stainless steel ring</p>			 1NC/1NO  2NC  2NO
 <p>8095底座 8095 base</p>			 1NC/1NO  2NC  2NO
 <p>8095可接底座 8095 connected base</p>			 1NC/1NO  2NC  2NO

Model:8095型防爆防腐控制按钮系列 8095 type explosion-proof control button series




Specifications 规格


型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
---------	--------------------------	---------------------------	--------------------------



8095防爆防腐控制按钮
8095 type explosion-proof control button



1NC/1NO




2NC



2NO




8095旋钮开关
8095 rotary switch

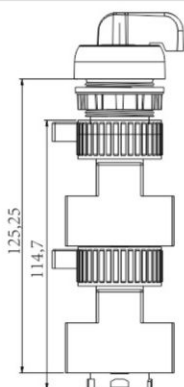


二档/三档
two/ three gears



1NC/1NO




2NC




2NO



8095防爆防腐急停按钮
8095 type explosion-proof emergency stop button



1NC/1NO



2NC




2NO

Model:8097-2型金属隔爆防爆控制按钮系列 8097-2 type metal explosion-proof control push button series




型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
---------	--------------------------	---------------------------	--------------------------

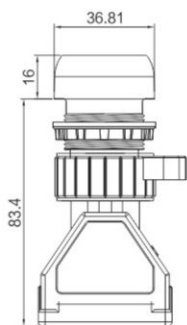

11 23 12 24	1NC/1NO
11 21 12 22	2NC
13 23 14 24	2NO

8097-2金属(不锈钢)隔爆防爆控制按钮
8097-2 type metal (stainless steel)
explosion-proof control push button

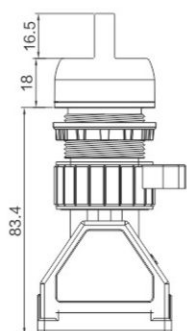


















二档
two gears


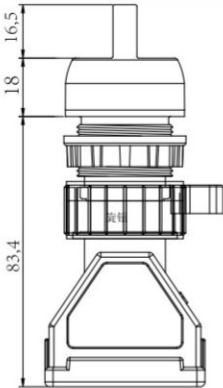


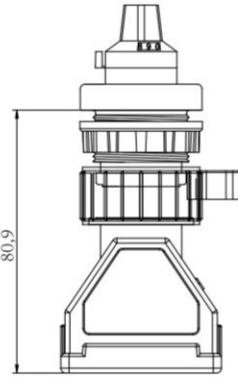

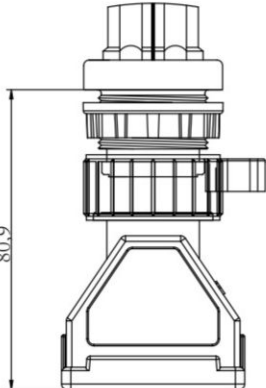

11 23 12 24	1NC/1NO
11 21 12 22	2NC
13 23 14 24	2NO

8097-2金属(不锈钢)隔爆防爆控制旋钮
8097-2 type metal (stainless steel)
explosion-proof control rotary button

Model:8097-2型金属隔爆防爆控制按钮系列 8097-2 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8097-2金属(不锈钢)隔爆防爆钥匙控制旋钮 8097-2 type metal (stainless steel) explosion-proof control rotary button with key</p>	 <p>25.5 83.4</p>	二档	 <p>11 23 12 24 1NC/1NO 11 21 12 22 2NC 13 23 14 24 2NO</p>
 <p>8097-2金属(不锈钢)隔爆防爆自锁控制按钮 8097-2 type metal (stainless steel) explosion-proof self-locking control push button</p>	 <p>36.8 28.3 24.5 16.69 83.4</p>		 <p>11 23 12 24 1NC/1NO 11 21 12 22 2NC 13 23 14 24 2NO</p>
 <p>8097-2金属隔爆防爆急停控制按钮 8097-2 type metal (stainless steel) explosion-proof emergency stop control push button</p>	 <p>40 26.3 12.5 83.4</p>		 <p>11 23 12 24 1NC/1NO 11 21 12 22 2NC 13 23 14 24 2NO</p>
 <p>8097-2金属隔爆防爆钥匙急停控制按钮 8097-2 type metal (stainless steel)explosion-proof emergency stop control push button with key</p>	 <p>40 12.5 26.27 83.4</p>		 <p>11 23 12 24 1NC/1NO 11 21 12 22 2NC 13 23 14 24 2NO</p>
 <p>8097-2金属(不锈钢)隔爆防爆控制旋钮 8097-2 type metal (stainless steel) explosion-proof control rotary button</p>	 <p>109.88 81.85 49.2</p>	二档/三档 two/ three gears	 <p>11 23 12 24 1NC/1NO 11 21 12 22 2NC 13 23 14 24 2NO</p>

Model:8097-2型金属隔爆防爆控制按钮系列 8097-2 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8097-2金属(不锈钢)隔爆防爆控制旋钮 8097-2 type metal (stainless steel) explosion-proof control rotary button</p>		二档/三档 two/ three gears	
 <p>防爆电位器-多圈 explosion-proof potentiometer-Multiturn</p>		10K 2W 5K 2W	
 <p>防爆金属电位器-单圈 explosion-proof metal potentiometer- single-turn</p>		100K 2W 50K 2W 20K 2W 10K 2W 5K 2W 2K 2W 1K 2W	
 <p>防爆电位器-单圈 explosion-proof potentiometer- single-turn</p>			


Model:8052型金属隔爆防爆控制按钮系列 8052 metal explosion proof control button series



型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
---------	--------------------------	---------------------------	--------------------------



8052-1金属隔爆控制按钮
8052-1 metal flameproof control button

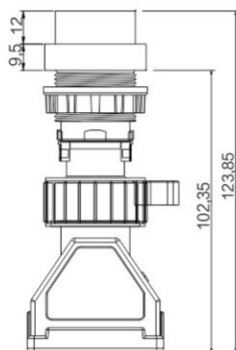


11 23
12 24 1NC/1NO

11 21
12 22 2NC

13 23
14 24 2NO



8052-2金属(不锈钢)隔爆自锁、自复按钮
8052-2 metal (stainless steel) flameproof self-locking and self recovery button














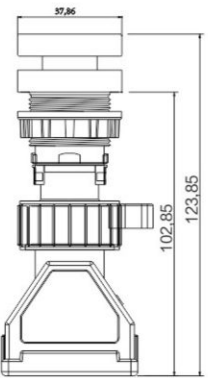




11 23
12 24 1NC/1NO




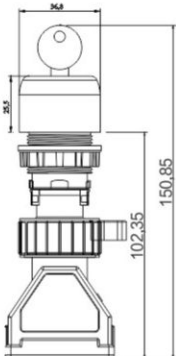






11 21
12 22 2NC

13 23
14 24 2NO

Model: 8052型金属隔爆防爆控制按钮系列 8052 metal explosion proof control button series





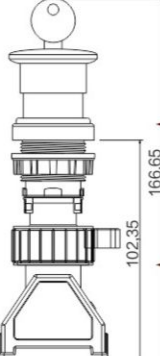




型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8052-3金属隔爆防爆(自锁、自复)控制旋钮 8052-3 Metal flameproof and explosion-proof (self-locking and self-recovery) control knob</p>			
 <p>8052-5金属隔爆防爆控制旋钮 8052-5 Metal explosion proof control knob</p>			
 <p>8052-6金属隔爆防爆控制旋钮 8052-6 Metal explosion proof control knob</p>			
 <p>8052-7金属隔爆控制按钮 8052-7 Metal flameproof control button</p>			

Model:8052型金属隔爆防爆控制按钮系列 8052 metal explosion proof control button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8052金属(不锈钢)隔爆防爆控制旋钮 8052 type metal (stainless steel) explosion-proof control rotary button</p>		二档 two gears	11 23 └─┘ └─┘ 12 24 1NC/1NO 11 21 └─┘ └─┘ 12 22 2NC 13 23 └─┘ └─┘ 14 24 2NO
 <p>8052金属(不锈钢)隔爆防爆控制钥匙旋钮 8052 Metal (stainless steel) flameproof explosion proof control key knob</p>		二档 two gears	11 23 └─┘ └─┘ 12 24 1NC/1NO 11 21 └─┘ └─┘ 12 22 2NC 13 23 └─┘ └─┘ 14 24 2NO
 <p>8052金属(不锈钢)隔爆防爆控制急停按钮 8052 Metal (stainless steel) flameproof explosion-proof control emergency stop button</p>			11 23 └─┘ └─┘ 12 24 1NC/1NO 11 21 └─┘ └─┘ 12 22 2NC 13 23 └─┘ └─┘ 14 24 2NO
 <p>8052金属(不锈钢)隔爆防爆控制钥匙急停按钮 8052 Metal (stainless steel) flameproof explosion proof control key emergency stop button</p>			11 23 └─┘ └─┘ 12 24 1NC/1NO 11 21 └─┘ └─┘ 12 22 2NC 13 23 └─┘ └─┘ 14 24 2NO

Model:8030/8031型防爆防腐控制按钮系列 8030/8031 type explosion-proof control push button series









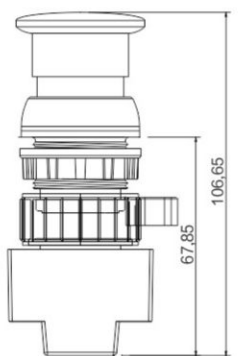



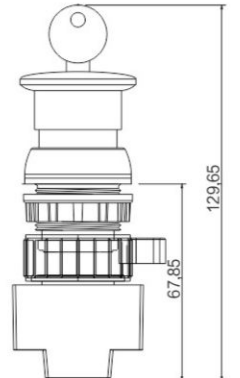




型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8030防爆防腐急停控制按钮 8030 type explosion-proof control emergency stop push button</p>			<div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 23 \\ & \\ \hline 12 & 24 \end{matrix}$ 1NC/1NO </div> <div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 21 \\ & \\ \hline 12 & 22 \end{matrix}$ 2NC </div> <div style="padding: 5px;"> $\begin{matrix} 13 & 23 \\ & \\ \hline 14 & 24 \end{matrix}$ 2NO </div>
 <p>8030防爆防腐钥匙急停控制按钮 8030 explosion proof and anticorrosion Key emergency stop control button</p>			<div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 23 \\ & \\ \hline 12 & 24 \end{matrix}$ 1NC/1NO </div> <div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 21 \\ & \\ \hline 12 & 22 \end{matrix}$ 2NC </div> <div style="padding: 5px;"> $\begin{matrix} 13 & 23 \\ & \\ \hline 14 & 24 \end{matrix}$ 2NO </div>
 <p>8030防爆防腐控制按钮 8030 type explosion-proof control push button</p>			<div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 23 \\ & \\ \hline 12 & 24 \end{matrix}$ 1NC/1NO </div> <div style="background-color: #e0e0e0; padding: 5px;"> $\begin{matrix} 11 & 21 \\ & \\ \hline 12 & 22 \end{matrix}$ 2NC </div> <div style="padding: 5px;"> $\begin{matrix} 13 & 23 \\ & \\ \hline 14 & 24 \end{matrix}$ 2NO </div>

Model: 8030/8031 型防爆防腐控制按钮系列 8030/8031 type explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8030 防爆防腐控制按钮 不锈钢圈 8030 type explosion-proof control push button - stainless steel</p>			 1NC/1NO  2NC  2NO
 <p>8030 防爆防腐带灯控制按钮 8030 type explosion-proof control push button with lamp</p>		 <p>指示灯电压: 24V、220V、380V Volatge of indicator lamp: 24V、220、380V</p>	 1NC/1NO  2NC  2NO
 <p>8030 防爆防腐带灯控制按钮 不锈钢圈 8030 type explosion-proof control push button with lamp - stainless steel</p>		 <p>指示灯电压: 24V、220V、380V Volatge of indicator lamp: 24V、220、380V</p>	 1NC/1NO  2NC  2NO
 <p>8050-3 带灯按钮配 8030 芯子 8050-3 button with lamp equipped with 8030 core</p>		 <p>指示灯电压: 24V、220V、380V Volatge of indicator lamp: 24V、220、380V</p>	 1NC/1NO  2NC  2NO


Model: 8030/8031 型防爆防腐控制按钮系列 8030/8031 type explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8031 防爆防腐控制旋钮 8031 explosion proof anti-corrosion control knob</p>			
 <p>8031 防爆防腐控制旋钮 8031 explosion proof anti-corrosion control knob</p>		<p>二档、三档 Second and third gear</p>	
 <p>8031 防爆防腐控制急停按钮 8031 explosion proof anticorrosion control emergency stop button</p>			
 <p>8031 防爆防腐控制钥匙急停按钮 8031 Explosion proof anti-corrosion control key emergency stop button</p>			







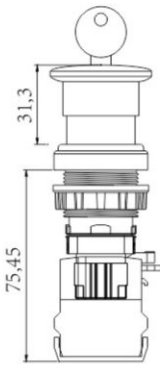



8050

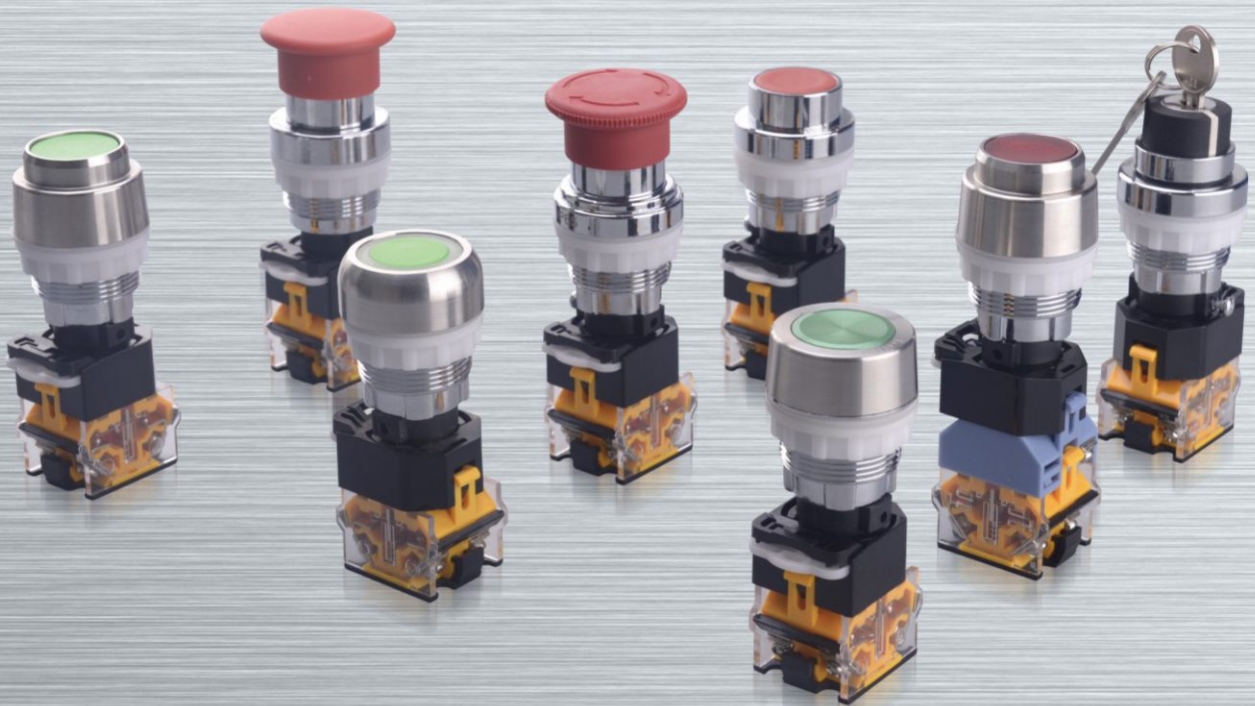型金属隔爆控制按钮


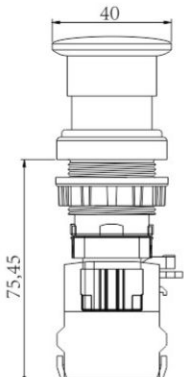

















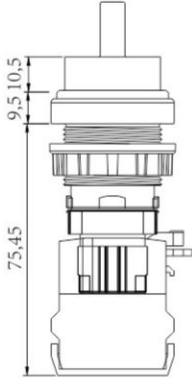




8050 type metal explosion-proof control push button series

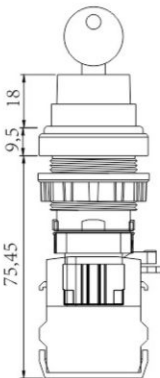

Model: 8050型金属隔爆控制按钮系列 8050 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8050金属隔爆控制按钮 8050 Metal Explosion-proof Control Push Button</p>			<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050金属隔爆控制旋钮 8050 Metal Explosion-proof Control Rotary Button</p>		<p>二档 two gears</p>	<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050金属隔爆钥匙急停控制按钮 8050 Metal Explosion-proof Emergency Stop Control Push Button With Key</p>			<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050金属隔爆钥匙控制旋钮 8050 Metal Explosion-proof Control Rotary Button With Key</p>		<p>二档 two gears</p>	<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>

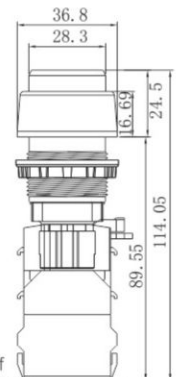
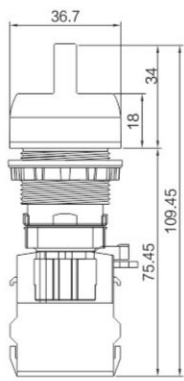

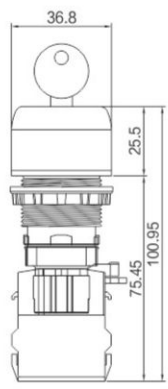




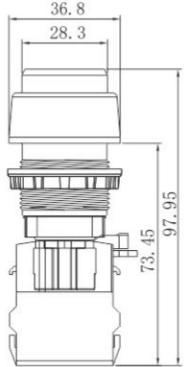

Model: 8050型金属隔爆控制按钮系列 8050 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8050金属隔爆急停控制按钮 8050 Metal Explosion-proof Emergency Stop Control Push Button</p>			 1NC/1NO  2NC  2NO
 <p>8050-2金属(不锈钢)隔爆控制按钮 8050-2 Metal (stainless Steel) Explosion-proof Control Push Button</p>			 1NC/1NO  2NC  2NO
 <p>8050-3金属(不锈钢)隔爆 带灯自锁、自复控制按钮 8050-3 Metal (stainless Steel) Explosion-proof Self-locking&self-resetting Control Button With Lamp</p>		 <p>指示灯电压: 12V、24V、220V、380V Volatge of singal lamp</p>	 1NC/1NO  2NC  2NO
 <p>8050-3金属(不锈钢)隔爆 自锁、自复控制按钮 8050-3 Metal (stainless Steel) Explosion-proof Self-locking&self-resetting Control Button</p>			 1NC/1NO  2NC  2NO








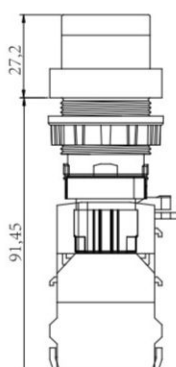





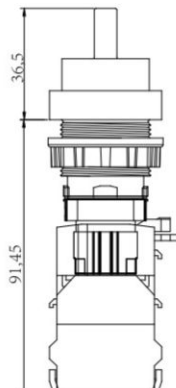








Model: 8050型金属隔爆控制按钮系列 8050 type metal explosion-proof control push button series

型号 Type		参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
短手柄 Short handle	长手柄 Long handle		二档 三档 two/ three gears	1NC/1NO 2NC 2NO
 8050-5金属隔爆控制按钮 8050-5 type metal explosion-proof control push button 金属手柄 Metal handle 8050-5金属隔爆控制旋钮 8050-5 type metal explosion-proof control rotary button				
 8050-6不锈钢金属隔爆控制按钮 8050-6 type metal (stainless steel) explosion-proof control push button				1NC/1NO 2NC 2NO
 8050-7不锈钢金属隔爆控制按钮 8050-7 type metal (stainless steel) explosion-proof control push button			自复型 self-resetting type	1NC/1NO 2NC 2NO

Model: 8050型金属隔爆控制按钮系列 8050 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8050-2金属(不锈钢) 隔爆控制旋钮 8050-2 type metal (stainless steel) explosion-proof control rotary button</p>		<p>二档 two gears</p>	<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050-2金属(不锈钢) 隔爆钥匙控制旋钮 8050-2 type metal (stainless steel) explosion-proof control rotary button with key</p>		<p>二档 two gears</p>	<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050-5金属隔爆控制按钮 8050-5 type metal explosion-proof control push button</p>			<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>
 <p>8050-5防爆金属自锁按钮 8050 type metal explosion-proof self-locking button</p>			<p>11 23 12 24 1NC/1NO</p> <p>11 21 12 22 2NC</p> <p>13 23 14 24 2NO</p>

Model: 8050型金属隔爆控制按钮系列 8050 type metal explosion-proof control push button series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	按钮触点 Push button contact
 <p>8050-5防爆金属带灯按钮 8050-5 type metal explosion-proof control push button with lamp</p>			 1NC/1NO  2NC  2NO
 <p>8050-1带灯按钮 8050-1 button with lamp</p>			 1NC/1NO  2NC  2NO
 <p>8050带灯旋钮 8050 rotary button with lamp</p>			 1NC/1NO  2NC  2NO
 <p>LA38带灯芯子 La38 core with lamp</p>			
 <p>LA38芯子 La38 core</p>			

防爆信号灯、蜂鸣器系列

Explosion-proof indicator lamp, buzzer series




Explosion-Proof Indicator Lamp, Buzzer Series




Model: 防爆信号灯, 蜂鸣器系列 Explosion-proof indicator lamp, buzzer series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	电压 Voltage
---------	--------------------------	---------------------------	------------




8050金属(不锈钢)
隔爆防爆闪光蜂鸣器
8050 metal(stainless steel)
explosion-proof flashlight buzzer




8030防爆闪光蜂鸣器
8030explosion-proof flashlight buzzer



12V、24V、220V、380V




8050-1金属(不锈钢)
隔爆防爆闪光蜂鸣器
8050-1 metal(stainless steel)
explosion-proof flashlight buzzer




8030防爆闪光蜂鸣器(不锈钢圈)
8030explosion-proof flashlight buzzer(stainless steel)

Model: 防爆信号灯, 蜂鸣器系列 Explosion-proof indicator lamp, buzzer series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	电压 Voltage
---------	--------------------------	---------------------------	------------




8030-1 防爆防腐信号灯
8030-1 explosion-proof indicator lamp




8030-2 防爆防腐信号灯
8030-2 explosion-proof indicator lamp



- AC/DC:12V
- AC/DC:24V-36V
- AC/DC:42V
- AC/DC:110V
- AC/DC:220V
- AC:220V-380V
- AC:660V



8030-1 防爆防腐信号灯不锈钢圈
8030-1 explosion-proof indicator lamp with stainless steel ring
















8050-1 金属 (不锈钢)
隔爆防爆信号灯
8050-1 metal (stainless steel)
explosion-proof indicator lamp

Model: 防爆信号灯, 蜂鸣器系列 Explosion-proof indicator lamp, buzzer series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	电压 Voltage
 <p>8050-2金属隔爆防爆信号灯 8050-2 metal explosion-proof indicator lamp</p>			AC/DC:12V AC/DC:24V-36V AC/DC:42V
 <p>8050-3金属隔爆防爆信号灯 8050-3 metal explosion-proof indicator lamp</p>			AC/DC:110V AC/DC:220V AC:220V-380V AC:660V
 <p>8050金属(不锈钢)隔爆电压表 信号灯二合一, 范围60V--500V 8050 metal(stainless steel) explosion-proof voltmeter with indicator lamp, range 60V-500V</p>			范围60V--500V Range 60V-500V
 <p>8050金属(不锈钢)隔爆电流表 8050 metal(stainless steel) explosion-proof</p>			范围0-200A 配互感器使用 Range 0-200a Use with transformer
 <p>8097防爆防腐信号灯 8097 explosion proof anti corrosion signal lamp</p>			24V、220V、380V
 <p>8097电缆型防爆防腐信号灯 8097 cable type explosion proof anti-corrosion signal lamp</p>			24V、220V、380V

Model: 防爆信号灯, 蜂鸣器系列 Explosion-proof indicator lamp, buzzer series

型号 Type	参考尺寸 Reference Dimension	颜色/规格 Color/specification	电压 Voltage
 <p>8050金属隔爆双色信号灯 8050 metal explosion-proof bi-colour indicator lamp</p>			12V、24V、220V、380V
 <p>8050-5金属隔爆防爆信号灯 8050-5 metal explosion-proof indicator lamp</p>			AC/DC:12V AC/DC:24V-36V AC/DC:42V AC/DC:110V AC/DC:220V AC:220V-380V AC:660V
 <p>8051-1防爆隔爆金属信号灯 8051-1 explosion proof flameproof metal signal lamp</p>			AC:220V-380V AC:660V
 <p>YHDX-200不锈钢声光报警器 Yhdx-200 stainless steel sound and light alarm</p>		24V 12V	接口规格 Interface specification G 1/2 NPT 1/2 G 3/4 NPT 3/4 M20 × 1.5 其他规格可定制 Other specifications can be customized
 <p>YHDX-200不锈钢声光报警器 Yhdx-200 stainless steel sound and light alarm</p>		220V	其他规格可定制 Other specifications can be customized